



EXIT EMERGENCY LIGHT

Emergency lights and exit signs are an essential element for any building construction or remodeling project. Liteharbor offers a wide range of exit and emergency lamps. Different color and different letter options also can be customized by Liteharbor factory.



EXL010-DN



EXL010-DL



EXL010-DR



EXL010-DL1



EXL010-DLR1



EXL010-DR1



EXL010-DD1



EXL010-DL2



EXL010-DLW2



EXL010-DR2



EXL010-PL2



EXL010-PLW2



EXL010-PR2



EXL010-PL



EXL010-PR



EXL010-PD



EXL010-N



EXL010-B



EXL010-DB



EXL010-B-RSA



EXL010-WA



EXL010-DG


NOTES:

- LED Running Man Signage Options
- Customized Service Consult Our Factory

Thermoplastic LED Exit Sign

ORDER MATRIX | Example: EXL001

A	B	C	D	E	F	G
A	Series				E	Housing Color
EXL001	Exit sign				W	White
					B	Black
B	Input Volt				F	Letter Color
277	120V				RD	Red
U	277V				G	Green
	120-277V				G	Arrow
C	Face				N	No
S	Single				L	Left
D	Double				R	Right
D	Battery				Q	Left and right
AC	Battery backup AC only					

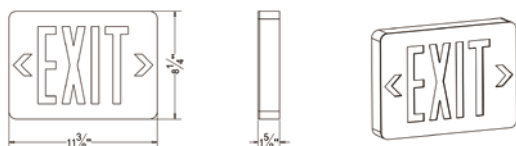

Fixture

- Engineering Grade Thermoplastic Material, ABS housing
- UL 94V-0 flame rating
- 90 Minute Minimum Emergency Mode
- Innovative, snap-together design allows for fast installation
- Mounting Hardware Included
- Replaceable directional chevron inserts are easily removed and reinserted
- Single or double face configuration
- Removable directional indicators
- Removable front cover for easy installation and battery maintenance
- Letters 6" height with 3/4" stroke
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Low energy consumption-only 2.0 watts at 120V

Light Source

- LEDs mounted on print circuit board
- LED lamps are operating in normal (AC input) and emergency (DC input) modes

Battery

- AC only, No battery backup
- Backup circuit provided for external emergency power source


Mounting

- Universal (wall, side or ceiling) mounting canopy
- Secured through a locking clip on the inside

Edge Lit Exit Sign

ORDER MATRIX | Example: EXL002

A	B	C	D	E	F	G
A	Series				E	Letter Color
EXL002	Exit sign				RD	Red
					G	Green
B	Input Volt				F	Arrow
277	120V				N	No
U	277V				L	Left
	120-277V				R	Right
C	Face				Q	Left and right
S	Single				G	Mounting
D	Double				E	End Mount
D	Battery				W	Wall Mount
AC	Battery backup AC only				C	Ceiling Mount
					RM	Recessed Mount

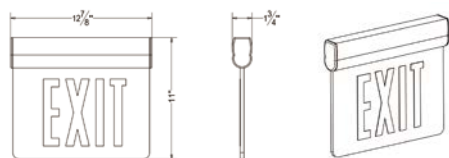

Fixture

- Rigid aluminum housing
- Etched, clear acrylic edge-lite replaceable panel (content can be changed as per customer's design)
- Letter 6" height with 3/4" stroke
- Single or double face configuration
- Removable directional indicators
- Removable front cover for easy installation and battery maintenance
- 90 Minute Minimum Emergency Mode
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Momentary test switch and LED AC-On indicator light
- Close Tolerance Electric Circuit, Short circuit proof

Light Source

- A soft and even glow radiates as illumination is provided through the use of the most cutting edge LED technology
- LED lamps are operating in normal (AC input) and emergency (DC input) modes

Battery

- AC only, No battery backup
- Backup circuit provided for external emergency power source
- 24 hours recharge after 90 minutes discharge


Mounting

- Universal mounting canopy, allowing for end, wall, or ceiling mounts
- Ceiling recessed mounting is also available

Die Cast Aluminum LED Exit Sign

ORDER MATRIX | Example: EXL003

A	B	C	D	E	F
A	Series			D	Battery
EXL003	Exit sign			AC	Battery backup AC only
B	Input Volt			E	Housing Color
277	120V 277V			W	White
U	120-277V			B	Black
C	Face			F	Letter Color
S	Single			RD	Red
D	Double			G	Green

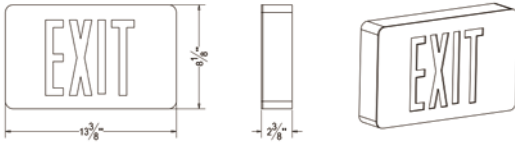

Fixture

- Super Slim, compact Profile
- Premium Die Cast Aluminum Material
- Innovative, snap-together design allows for fast installation
- Mounting Hardware Included
- Snap-out knockouts and chevron directional arrows.
- Removable directional indicators
- Letters 6" height with 3/4" stroke
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- LED indicator light and push button test switch

Light Source

- LEDs mounted on print circuit board
- LED lamps are operating in normal (AC input) and emergency (DC input) modes

Battery

- AC only, No battery backup
- Backup circuit provided for external emergency power source
- 24 hours recharge after 90 minutes discharge


Mounting

- Universal (wall, side or ceiling) mounting
- Universal knockouts on back plate allow for wall mounting directly to standard J-Box

Wet Location Single Face LED Exit Sign

ORDER MATRIX | Example: EXL005

A	B	C	D	E	
A	Series			D	Housing Color
EXL005	Exit sign			W	White
B	Input Volt			B	Black
277	120V 277V			E	Letter Color
U	120-277V			RD	Red
C	Battery			G	Green
AC	Battery backup AC only				

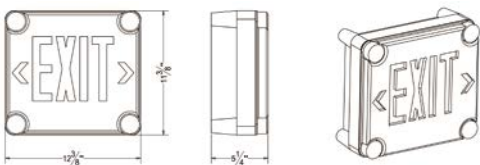

Fixture

- Fully gasketed polycarbonate lens and ABS thermoplastic housing
- Innovative design allows for fast installation
- Knockout directional chevrons
- Letters 6" height with 3/4" stroke
- Single face configuration only
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Low energy consumption-only 2.5 watts at 120V
- LED indicator light and push button test switch

Light Source

- LED lamps are operating in normal (AC input) and emergency (DC input) modes
- Optional 6V SEALED BEAM lamp heads

Battery

- AC only, No battery backup
- Battery backup, 24 hours recharge after 90 minutes discharge
- Low voltage battery disconnection- Preventing deep discharge damage to the battery


Mounting

- Wall, ceiling or end mounting configurations are available

LED Exit & Emergency Light

ORDER MATRIX | Example: EXL009

A	B	C	D	E
A	Series			D
EXL009	Exit sign			Battery
B	Input Volt			AC
277	120V			Battery backup
U	277V			AC only No battery
	120-277V			E
C	Face			Letter Color
S	Single			RD
D	Double			Red
				G
				Green

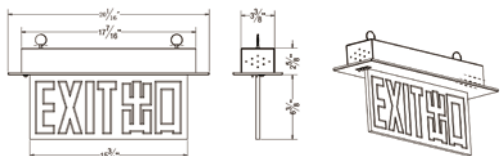

Fixture

- Universal Single or Double Face
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Etched, clear acrylic edge-lite face plate
- Universally Surface Mounted, Recessed Mounted Pendant Mounted All Are Available
- Red or Green Letter Colors

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Electrical Technology

- Dual Voltage Input 120V-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Warranty

- EXIT: 2-Year
- Battery: 15-Year Pro-rata



Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 2.5W, AC
- DC: LED Lamps
- 3W 3.6VDC

LED Exit & Emergency Light

ORDER MATRIX | Example: EXL010

A	B	C	D	E	F
A	Series			E	Letter Color
EXL010	Exit sign			RD	Red
B	Input Volt			G	Green
277	120V			F	Arrow
U	277V			N	No
	120-277V			L	Left
C	Face			R	Right
S	Single			LR	Double
D	Double				
D	Battery				
AC	Battery backup				
	AC only				

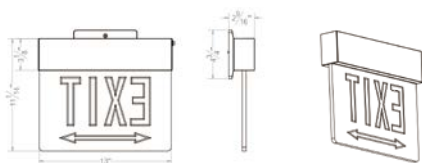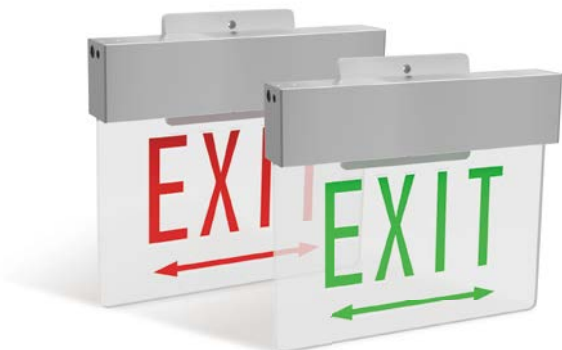

Fixture

- Universal Single or Double Face
- Energy Saving LED Lamps
- Aluminum Housing
- Clear Acrylic Face Plate
- Direction of Narrow Can Be Done As Customers' Needs
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors
- Die-cast Canopy Provided

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Electrical Technology

- Dual Voltage Input 120-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Warranty


- EXIT: 2-Year
- Battery: 15-Year Pro-rata

Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time 0.045A, LM>50
- 277V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time 0.019A, LM>50
- DC: LED Lamps

LED Exit & Emergency Light

ORDER MATRIX | Example: EXL011

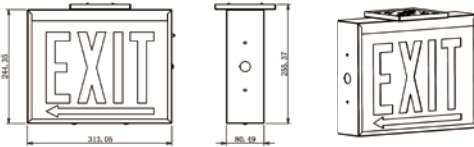

A	B	C	D	E	F
A Series			D Battery		
EXL011	Exit sign		Battery backup AC only		
B Input Volt			E Letter Color		
277	120V		RD Red		
U	277V		G Green		
C Face			F Arrow		
S	Single		N No		
D	Double		L Left		
			R Right		
			LR Double		

Fixture

- Universal Single or Double Face
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Other State Styles Are Also Available
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Electrical Technology

- Dual Voltage Input 120-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Warranty


- EXIT: 2-Year
- Battery: 15-Year Pro-rata

Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, Input: 7W, Output: 1.8W, 90 Minutes Emergency Time, 0.077A, LM>50
- 277V, Input: 7W, Output: 1.8W, 90 Minutes Emergency Time, 0.033A, LM>50
- DC: LED Lamps

Recessed Mounted LED Exit & Emergency Light

ORDER MATRIX | Example: EXL012

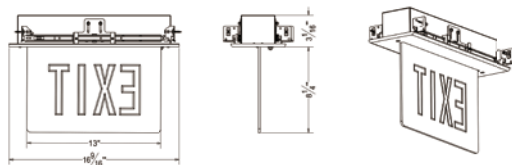

A	B	C	D	E	F
A Series			D Battery		
EXL012	Exit sign		Battery backup AC only		
B Input Volt			E Letter Color		
277	120V		RD Red		
U	277V		G Green		
C Face			F Arrow		
S	Single		N No		
D	Double		L Left		
			R Right		
			LR Double		

Fixture

- Universal Single or Double Face
- Energy Saving LED Lamps
- Aluminum Housing
- Clear Acrylic Face Plate
- Direction of Narrow Can Be Done As Customers' Needs
- Recessed Mounted
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Electrical Technology

- Dual Voltage Input 120-277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Warranty


- EXIT: 2-Year
- Battery: 15-Year Pro-rata

Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time, 0.045A, LM>50
- 277V, Input: 4.2W, Output: 0.7W, 90 Minutes Emergency Time, 0.019A, LM>50
- DC: LED Lamps

LED Exit & Emergency Light

ORDER MATRIX | Example: EXL013

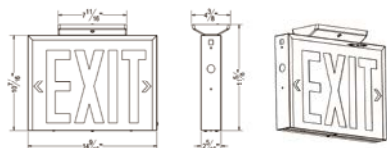

A	B	C	D	E	F
A Series		D Battery			
EXL013	Exit sign	AC		Battery backup AC only	
B Input Volt		E Letter Color			
277	120V 277V	RD		Red	
U	120-277V	G		Green	
C Face					
S	Single				
D	Double				

Fixture

- Universal Single or Double Face
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Other State Styles Are Also Available
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- 3.6V

Electrical Technology

- Dual Voltage Input 120/277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Warranty



- EXIT: 2-Year
- Battery: 15-Year Pro-rata

Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, 5W, 90 Minutes Emergency Time, 0.041A
- 277V, 5W, 90 Minutes Emergency Time, 0.018A
- DC: LED Lamps

LED Elevator Sign

ORDER MATRIX | Example: EXL012-RR-RD

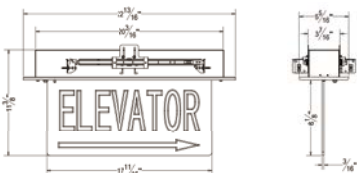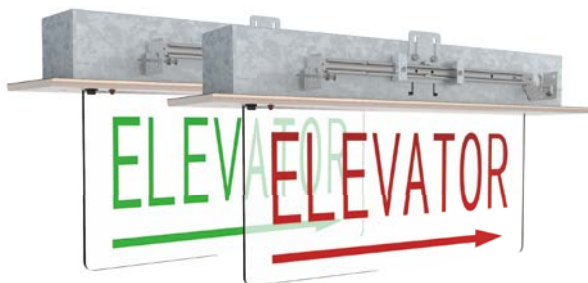

A	B	C	D	E	F	
A Series		E Letter Color				
EXL012-RR-RD	Exit sign (Elevator)	RD		Red		
B Input Volt		G			Green	
277	120V 277V	F			Arrow	
U	120-277V	N			No	
C Face		L			Left	
S	Single	R			Right	
D	Double	LR			Double	
D Battery		G			Mounting	
AC	Battery backup AC only	E			End Mount	
		W			Wall Mount	
		C			Ceiling Mount	
		RM			Recessed Mount	

Fixture

- EXIT signs Single sided ceiling mount 1~3W, 120V/277V
- White translucent background with red painted letters
- White LED lighting (5100-5500k)
- Acrylic plate material
- Rechargeable Ni-Cad battery (option for AC/DC-self powered) backup
- AC circuit for emergency(option for AC/DC-Two Circuit)

Optional

- Arrow optional
- Green or red printed letter
- Single or double face
- Mounting way

Packing

- 4pcs/ctn Carton size: 418*498*354mm
- Net weight: 8.0kg
- Gross weight: 10.2kg


Thermoplastic Emergency Light



Fixture

- Injection-molded thermoplastic ABS housing
- Fully adjustable glare-free single
- 5" diameter canopy matching round mounting plate for 3" or 4" box standard
- 6V 6W DC lamp for emergency light
- Damp location listed
- UL Number: E472028

Item: EML101

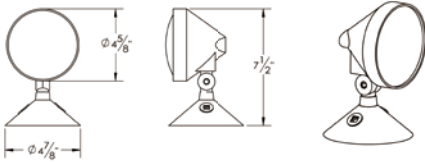

Thermoplastic Emergency Light



Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast and easy installation
- Fully adjustable glare-free emergency light heads
- With push button test switch
- 100% solid-state switching
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation

Light Source

- 2X6V 5W wedge base T15 DC lamps for emergency mode
- Lamps are operating in normal (AC input) and emergency (DC input) MODES


Battery

- Battery backup (6V 4.5Ah)
- 24 hours recharge after 90 minutes discharge
- Low voltage battery disconnection

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

Item:EML201

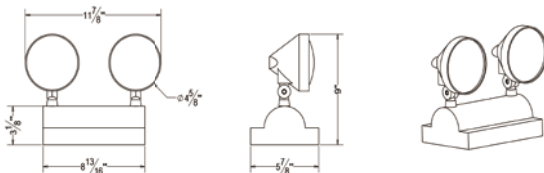

Thermoplastic Emergency Light With Power Supply Cord

Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast and easy installation
- Fully adjustable glare-free emergency light heads
- With push button test switch
- 100% solid-state switching
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation

Light Source

- 2X6V 5W wedge base T15 DC lamps for emergency mode
- Lamps are operating in normal (AC input) and emergency (DC input) MODES


Battery

- Battery backup (6V 4.5Ah)
- 24 hours recharge after 90 minutes discharge
- Low voltage battery disconnection

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

Item:EML202

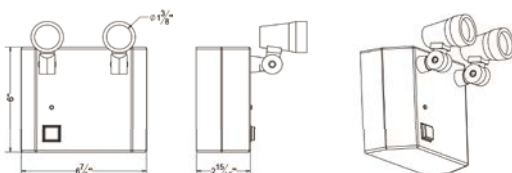

LED Emergency Light



Item: EML203



Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast and easy installation
- Completely self-contained, fully automatic operation
- Compact low-profile design in neutral finish
- Push-to-test switch
- Damp location listed
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Test switch and charge rate indicator

Light Source

- 2X6V 5.4W wedge base T15 DC lamps for emergency mode

Battery

- 24 hours recharge after 90 minutes discharge
- Low voltage battery disconnection


Mounting

- Universal (wall, side or ceiling) mounting

LED Emergency Light



Item: EML205

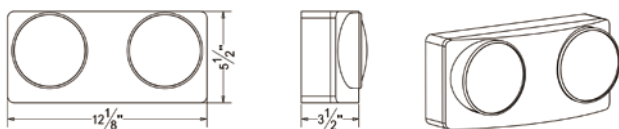

Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Two fully adjustable eyeball shape light heads for emergency light
- Innovative, snap-together design for fast installation
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation
- LED indicator light and push button test switch
- Remote capability- may power additional remote heads (up to 6V 12W) with additional battery

Light Source

- 2x6V 5.4W DC T5 wedge lamps for emergency mode

Battery

- Lead-Calcium Battery (6V 4.5Ah)
- May use additional battery, when add remote light heads to the fixture. (Total 2pcsx6V 4.5 Ah battery)
- Low voltage battery disconnection


Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

LED Emergency Light



Item: EML206

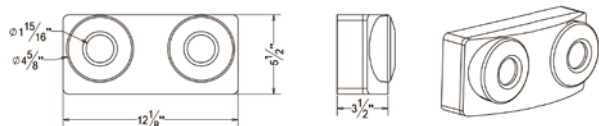

Fixture

- Injection-molded thermoplastic ABS housing
- Completely self-contained
- Fully automatic operation
- Compact low-profile design
- Push-to-test switch
- Damp location listed
- Two fully adjustable eyeball shape light heads for emergency light
- UL Number: E472028

Light Source

- Ultra-bright MR16 LED lamps

Electrical Technology

- 120/277 VAC Dual voltage operation
- Test switch and charge rate indicator
- Operation time-90 minutes


Battery

- Battery backup
- Full Recharge Time is 24hrs (max.)
- Automatic low voltage disconnects (LVD)

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

Emergency Light

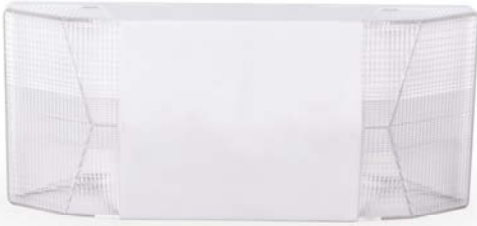

Fixture

- Injection-molded thermoplastic housing
- Compact low-profile design in neutral finish
- Universal mounting plate w/ Quick Connect for rapid installation
- Two fresnel lenses maximize light output and provides glare-free light distribution
- Push-to-test switch
- Automatic low voltage disconnects (LVD)
- Damp location listed
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- Test switch and charge rate indicator
- Operation time-90 minutes

Light Source

- 2X6V 5W wedge base T15 DC lamps for emergency mode


Battery

- Full Recharge Time is 24hrs (max.), operation time-90 minutes
- Automatic low voltage disconnects (LVD)

Mounting

- Wall or Ceiling mounting
- Easily removed mounting knock-outs and J-box pattern on back plate

Item: EML207

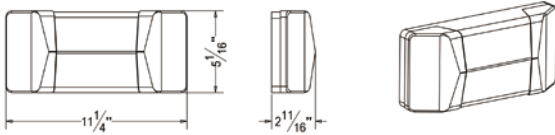


Emergency Light



Fixture

- Injection-molded thermoplastic ABS housing
- Fully adjustable glare-free single or double heads
- 5" diameter canopy matching round mounting plate for 3" or 4" box standard
- 6V 6W DC lamp for emergency light
- Damp location listed

Item:EML211

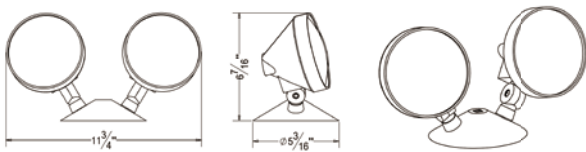

Remote Head Led Emergency Light



Fixture

- Bright 9 Watt Long Life Lamps
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- New York Style Other State Style Also Are Available
- Other State Styles Are Also Available
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern

Electrical Technology

- Dual Voltage Input 120/277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Battery

- Lead-acid storage battery
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- Rechargeable 6V

Code Compliance

- UL 924 Listed
- Most State and Local Codes


Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, 7.1W, 90 Minutes Emergency Time, 0.066A
- 277V, 8W, 90 Minutes Emergency Time, 0.031A
- DC: LED Lamps

Warranty

- EXIT: 2-Year
- Battery: 15-Year Pro-rata


Item:EML212

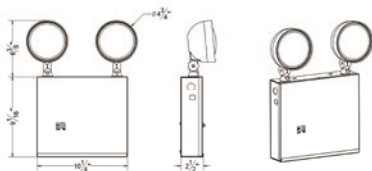

Exit & Emergency Light Combo

ORDER MATRIX | Example: XML201

A	B	C	D	E	F	G
A	Series			E	Housing Color	
XML201	Combo			W	White	
				B	Black	
B	Input Volt			F	Letter Color	
277	120V			RD	Red	
U	277V			G	Green	
	120-277V			G	Arrow	
C	Light Source			N	No	
L	LEDs			L	Left	
D	Battery			R	Right	
	Battery backup			Q	Left and right	
AC	AC only					

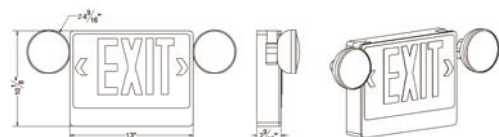

Fixture

- > Injection-molded thermoplastic ABS housing
- > UL 94V-0 flame rating, fire-retardant
- > LED indicator light and push button test switch
- > Single face configuration
- > Letters 6" height with 3/4" stroke
- > Innovative, snap-together design allows for fast installation
- > Replaceable directional chevron inserts are easily removed and reinserted

Electrical Technology

- > 120/277 VAC Dual voltage operation
- > LED indicator light and push button test switch

Light Source

- > LEDs are mounted mound on spirit circuit board (for exit sign)
- > LED lamps are operating in normal (AC input) and emergency (DC input) MODES

Battery

- > 6V 4.5Ah battery
- > 24 hours recharge after 90 minutes discharge
- > Low voltage battery disconnection-preventing deep discharge damage to the battery


Mounting

- > Combination unit is suitable for surface ceiling, wall and pendant mounting

Exit & Emergency Light Combo

ORDER MATRIX | Example: XML202

A	B	C	D	E	F	G
A	Series			E	Housing Color	
XML202	Combo			W	White	
				B	Black	
B	Input Volt			F	Letter Color	
277	120V			RD	Red	
U	277V			G	Green	
	120-277V			G	Arrow	
C	Light Source			N	No	
L	LEDs			L	Left	
D	Battery			R	Right	
	Battery backup			Q	Left and right	
AC	AC only					

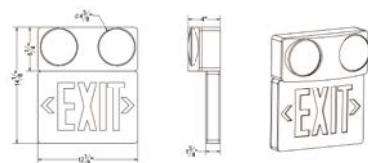

Fixture

- > Injection-molded thermoplastic ABS housing
- > Combination housing design, exit & emergency unit
- > UL 94V-0 flame rating
- > Innovative, snap-together design allows for fast installation
- > Letter 6" height with 3/4" stroke
- > Two fully adjustable compact size eyeball shape light heads for emergency light
- > UL Number: E472028

Electrical Technology

- > 120/277VAC dual voltage operation
- > Low power consumption: 2.3 watts at normal operation, 12 watts at emergency operation
- > LED indicator light and push button test switch

Light Source

- > LEDs are mounted on print circuit board (For Exit Sign); LEDs or incandescent light source for emergency
- > LED lamps are operating in normal (AC input) and emergency (DC input) modes
- > 2 X 6V 5.4 or 6W wedge base T15 DC lamps for emergency mode

Battery

- > 6V 4.5Ah battery
- > 24 hours recharge after 90 minutes discharge
- > Low voltage battery disconnection-preventing deep discharge damage to the battery


Mounting

- > Combination unit is suitable for surface ceiling, wall and pendant mounting

Exit & Emergency Light Combo

ORDER MATRIX | Example: XML203

A	B	C	D	E	F	G
A	Series			E	Housing Color	
XML203	Combo			W	White	
				B	Black	
B	Input Volt			F	Letter Color	
	120V			RD	Red	
277	277V			G	Green	
U	120-277V			G	Arrow	
C	Light Source			N	No	
L	LEDs			L	Left	
D	Battery			R	Right	
	Battery backup			Q	Left and right	
AC	AC only					

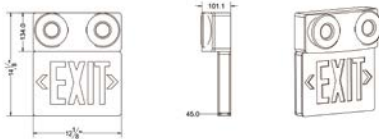

Fixture

- Injection-Molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast installation
- Letter 6" height with 3/4" stroke
- Low energy consumption
- Lead-calcium battery

Electrical Technology

- 120/277VAC Dual voltage operation
- LED indicator light and push button test switch

Light Source

- LEDs are mounted on print circuit board. (For Exit Sign)
- LED lamps are operating in normal (AC input) and emergency (DC input) modes
- 2x6V 5.4W LED MR16 lamps for emergency mode

Battery

- Battery backup (6V 4.5Ah)
- 24 hours recharge after 90 minutes discharge
- Low voltage battery disconnection-preventing deep discharge damage to the battery

Mounting

- Combination unit is suitable for surface ceiling, wall and pendant mounting

Wet Location Single Face Combo

ORDER MATRIX | Example: XML205

A	B	C	D	E	F	G
A	Series			E	Housing Color	
XML205	Combo			W	White	
				B	Black	
B	Input Volt			F	Letter Color	
	120V			RD	Red	
277	277V			G	Green	
U	120-277V			G	Arrow	
C	Light Source			N	No	
L	LEDs			L	Left	
D	Battery			R	Right	
	Battery backup			Q	Left and right	
AC	AC only					



Fixture

- Fully gasketed polycarbonate lens and ABS thermoplastic housing
- Innovative design allows for fast installation
- Knockout directional chevrons
- Letters 6" height with 3/4" stroke
- Single face configuration only
- Optional emergency heads
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC dual voltage operation
- Low energy consumption-only 2.5 watts at 120V
- LED indicator light and push button test switch

Light Source

- LED lamps are operating in normal (AC input) and emergency (DC input) modes
- Optional 6V SEALED BEAM lamp heads

Battery

- AC only, No battery backup
- Battery backup, 24 hours recharge after 90 minutes discharge
- Low voltage battery disconnection- Preventing deep discharge damage to the battery

Mounting

- Wall, ceiling or end mounting configurations are available

Exit & Emergency Light Combo

ORDER MATRIX | Example: XML206

A	B	C	D	E	F	G
A Series			E Housing Color			
XML206	Combo		W White			
B Input Volt			B Black			
277	120V		F Letter Color			
U	277V		RD Red			
C Light Source			G Green			
L	LEDs		G Arrow			
D Battery			N No			
AC			L Left			
			R Right			
			Q Left and right			
			Battery backup			
			AC only			



Fixture

- Injection-Molded thermoplastic ABS housing
- Combination housing design, exit & emergency unit
- Plastic enclosure with UL94-5VA flame rating
- Innovative, snap-together design allows for fast installation
- Letter 6" height with 3/4" stroke
- Emergency lights can be adjusted. (Side mounting or Top mounting)
- UL Number: E472028

Electrical Technology

- 120/277 VAC Dual voltage operation
- LED indicator light and push button test switch
- Low power consumption 2.8 watts at normal operation, 3.5 watts at emergency operation

Light Source

- 2 X LED light heads for emergency mode
- 70lm output on emergency operation

Battery

- 24 hours recharge after 90 minutes discharge
- Low voltage battery disconnection-preventing deep discharge damage to the battery


Mounting

- Combination unit is suitable for surface ceiling, wall and pendant mounting

Exit & Emergency Light Combo

ORDER MATRIX | Example: XML207

A	B	C	D	E	F	G
A Series			E Housing Color			
XML207	Combo		W White			
B Input Volt			B Black			
277	120V		F Letter Color			
U	277V		RD Red			
C Light Source			G Green			
L	LEDs		G Arrow			
D Battery			N No			
AC			L Left			
			R Right			
			Q Left and right			
			Battery backup			
			AC only			

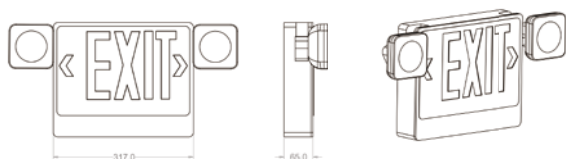

Fixture

- Injection-molded thermoplastic ABS housing
- UL 94V-0 flame rating
- Use small square head
- Innovative, snap-together design allows for fast installation
- Replaceable directional chevron inserts are easily removed and reinserted
- Letters 6" height with 3/4" stroke
- Damp Location Rated
- UL Number: E472028

Electrical Technology

- 120/277VAC Dual voltage operation
- LED indicator light and push button test switch

Light Source


- LEDs mounted on print circuit board. (For Exit Sign)
- LED lamps are operating in normal (AC input) and emergency (DC input) modes
- 2 X 6V 6W halogen MR-16 lamps for emergency mode

Battery

- Lead-Acid Battery (6V 4.5Ah)
- May use additional battery, when add remote light heads to the fixture. (Total 2pcs x 6V 4.5Ah battery)
- Low voltage battery disconnection

Mounting

- Combination unit is suitable for surface ceiling, wall and pendant mounting



Fixture

- Bright 9 Watt Long Life Lamps Three Heads
- Energy Saving LED Lamps
- Heavy Duty 20 Gauge Steel Housing
- Durable White Powder Coated Finish Other Finish Please Consult Factory
- Other State Style Are Also Available
- Universally Surface Mounted, Ceiling, Wall or End
- Universal J-box Mounting Pattern
- Red or Green Letter Colors

Battery

- Sealed Nickel Cadmium (Self-Powered exits only)
- Maintenance-Free, Long Life
- Full Recharge Time 24 Hours (max)
- Rechargeable 6V

Lamp Date

- AC LED: Long Life LED Lamps Provide Uniform Diffused Illumination
- 120V, 3.22W, 90 Minutes Emergency Time, 0.0295A
- 277V, 3.16W, 90 Minutes Emergency Time, 0.0127A
- DC: LED Lamps

LED Exit & Emergency Light

ORDER MATRIX | Example: XML208

A	B	C	D	E	F
A	Series		D	Letter Color	
XML208	Exit sign		RD	Red	
			G	Green	
B	Input Volt		E	Face	
277	120V		W	Single	
U	277V		B	Double	
	120-277V				
C	Battery		F	Lamp Head	
AC	Battery backup		2	2 Heads	
	AC only No battery		3	3 Heads	

Electrical Technology

- Dual Voltage Input 120/277VAC 60Hz
- Solid-State Voltage Limited Charger
- Solid-state Switching
- Brownout Circuit
- Low Voltage Disconnected
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

Code Compliance

- UL 924 Listed
- Most State and Local Codes

Warranty

- EXIT: 2-Year
- Battery: 15-Year Pro-rata