


EXL001-R LED Exit & Emergency Light

| | | | |
|------------------|--|--------------------|------------|
| Catalog # | | Prepared by | LiteHarbor |
| Project | | Date | |
| Notes | | | |

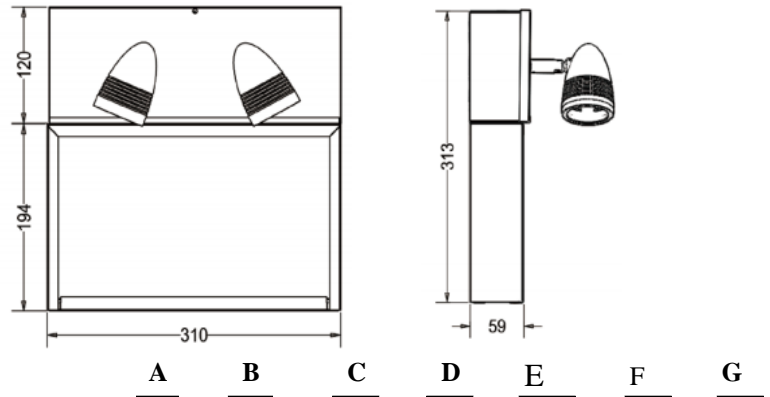

Item No.:EXL001-R

Description

- 1) 20 Gauge steel housing
- 2) AC-Only or self-powered models.
- 3) 120V/347V AC operation.
- 4) Long-life, energy-saving LED technology.
- 5) Power-on LED indicator Light and push-to-test switch.
- 6) Comes standard with two pictogram films per face,
for direction selection
- 7) Low volt battery disconnection-preventing deep
discharge damage to the battery.
- 8) Universal canopy available.
- 9) Universal knockout chevrons.
- 10) Innovative, snap-together design allows for fast installation
- 11) Warranty-2 years limited warranty.

Housing Colour

WH / BK

Mounting

Universal (wall, side or ceiling mounting)

Key hole slots are stamped into the backplate

| | |
|---------------|------------|
| A | Series |
| XMI202 XML202 | Exit Combo |

| | |
|---|-----------|
| B | Sign |
| | Exit Sign |
| R | Running |

| | |
|-----|---------------|
| C | Input Voltage |
| | 120V |
| 347 | 347V |

| | |
|----|-------------|
| D | Face Q'ty |
| SF | Single Face |
| DF | Double Face |

| | |
|----|----------------|
| E | Battery Backup |
| | Battery Backup |
| AC | AC Only |



EXIT & EMERGENCY LIGHT



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Jan. 2015

Lamps

LED 2x3W Max.

Battery

Lead-Calcium battery (6v 4.5Ah)

The sign is designed with a maintenance free

Self-Powered model delivers standard two hours of
back-up lighting

Recharge time of the battery is twenty-four (24) hours.

Warranty

2 years limited warranty.

| F | Housing Color |
|----|---------------|
| BK | Black |
| WH | White |

| G | Arrow Direction |
|-----|-----------------|
| | No indicators |
| LA | Left indicator |
| RA | Right indicator |
| UA | Up indicator |
| DA | Down indicator |
| URA | 45 ° up right |
| DRA | 45 ° down right |
| ULA | 45 ° up left |
| DLA | 45 ° down left |



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015