



# Liteharbor Lighting Technology Co., Ltd.

Item No.: FL001



## Features

1. Aluminum die-cast alloy body and toughened glass, durable and completely corrosion resistance.
2. Good heat dissipation performance.
3. IP rating is up to IP65.
4. High utilization of power, PF>0.95.
5. Compared with traditional ones, energy-saving percentage: 60%.
6. Use 1PCS integrated high-power LED (COB).
7. Service life over 50000 hours.
8. Follow RoHS and CE certified.

## Technical Parameters

Model No.	DGL-FL001
Input Voltage	85-265V AC, 50-60Hz
LED Q'ty	1pcs*10W
LED Efficiency	80-90lm/W
Initial Lumens	>900lm (cool white) >870lm (natural white) >830lm (warm white)
Power Factor	>0.95
Color	cool white/ natural white/ warm white/ red/ green/ blue/ RGB
Beam Angle	120 degrees
Finished Color	Gray (default), Black
Housing Material	Aluminum
IP Rating	IP65
Life Span	50,000 hrs
Certificate	CE, RoHS

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



# Liteharbor Lighting Technology Co., Ltd.

Item No.: FL002



## Features

1. Aluminum die-cast alloy body and toughened glass, durable and completely corrosion resistance.
2. Good heat dissipation performance.
3. IP rating is up to IP65.
4. High utilization of power, PF>0.95.
5. Compared with traditional ones, energy-saving percentage: 60%.
6. Use 1PCS integrated high-power LED (COB).
7. Service life over 50000 hours.
8. Follow RoHS and CE certified.

## Technical Parameters

Model No.	DGL-FL002
Input Voltage	85-265V AC, 50-60Hz
LED Q'ty	1pcs*20W
LED Efficiency	80-90lm/W
Initial Lumens	>1800lm (cool white) >1680lm (natural white) >1600lm (warm white)
Power Factor	>0.95
Color	cool white/ natural white/ warm white
Beam Angle	120 degrees
Finished Color	Gray (default), Black
Housing Material	Aluminum
IP Rating	IP65
Life Span	50,000 hrs
Certificate	CE, RoHS

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



# Liteharbor Lighting Technology Co., Ltd.

Item No.: FL003



## Features

1. Aluminum die-cast alloy body and toughened glass, durable and completely corrosion resistance.
2. Good heat dissipation performance.
3. IP rating is up to IP65.
4. High utilization of power, PF>0.95.
5. Compared with traditional ones, energy-saving percentage: 60%.
6. Use 1PCS integrated high-power LED (COB).
7. Service life over 50000 hours.
8. Follow RoHS and CE certified.

## Technical Parameters

Model No.	DGL-FL003
Input Voltage	85-265V AC, 50-60Hz
LED Q'ty	1pcs*60W
LED Efficiency	80-90lm/W
Initial Lumens	>5400lm (cool white) >5150lm (natural white) >4800lm (warm white)
Power Factor	>0.95
Color	cool white/ natural white/ warm white
Beam Angle	120 degrees
Finished Color	Gray (default), Black
Housing Material	Aluminum
IP Rating	IP65
Life Span	50,000 hrs
Certificate	CE, RoHS

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



# Liteharbor Lighting Technology Co., Ltd.

Item No.: FL004



## Features

1. Aluminum die-cast alloy body and toughened glass, durable and completely corrosion resistance.
2. Good heat dissipation performance.
3. IP rating is up to IP65.
4. High utilization of power, PF>0.95.
5. Compared with traditional ones, energy-saving percentage: 60%.
6. Use 1PCS integrated high-power LED (COB).
7. Service life over 50000 hours.
8. Follow RoHS and CE certified.

## Technical Parameters

Model No.	DGL-FL004
Input Voltage	85-265V AC, 50-60Hz
LED Q'ty	1pcs*30W
LED Efficiency	80-90lm/W
Initial Lumens	>2700lm (cool white) >2550lm (natural white) >2400lm (warm white)
Power Factor	>0.95
Color	cool white/ natural white/ warm white
Beam Angle	120 degrees
Finished Color	Gray (default), Black
Housing Material	Aluminum
IP Rating	IP65
Life Span	50,000 hrs
Certificate	CE, RoHS

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



# Liteharbor Lighting Technology Co., Ltd.

Item No.: FL005



FL005

## Basic Info

Light Source	LED
Install Style	Outdoor
Color	R/G/B/W/Y/Ww
Voltage	110-240V
Export Markets	Global
Packing	Carton, Wooden Crate
Origin	Guangdong
Production Capacity	10000per Month
Trademark	Liteharbor

## Product Description

Flood lights Features

RGB, High brightness (power: 1\*60W)

Long life, over 50,000 hours of usable life Energy efficient, consume 80% less power compare to neon systems

Durable, operates in both extremes of temperature for many outdoor environments Waterproof, IP rating is IP65.

Easy installation. Controller and program are easy to operate.

Low maintenance

3 year limited warranty

System works in many countries

## Application:

Linear lighting

Atmospheric Interior Lighting

Road

Bridge

Floodlighting

Wall washing for bars, clubs, hotels, stages, parks, plazas Commercial buildings facade, mosques, museums, and art galleries

---

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



# Liteharbor Lighting Technology Co., Ltd.

Item No.: FL006

## Led portable flood light for plant



### Specifications

30w ip65 portable led work light  
Cree, citizen, epistar, Bridgelux chips  
wide beam angle 120w max  
portable working light

### Basic Info

Light Source	LED
Install Style	Outdoor
Color	R/G/B/W/Y/Ww
Voltage	110-240V
Export Markets	Global
Packing	Carton, Wooden Crate
Origin	Guangdong
Production Capacity	10000per Month
Trademark	Liteharbor

### Product Description

Flood lights Features  
RGB, High brightness (power: 1\*30/40/60/70/120/W)  
Long life, over 50, 000 hours of usable life  
Energy efficient, consume 80% less power compare to neon systems  
Durable, operates in both extremes of temperature for many outdoor environments  
Waterproof, IP rating is IP65.  
Easy installation. Controller and program are easy to operate.  
Low maintenance  
3 year limited warranty  
System works in many countries

### Application:

Linear lighting  
Atmospheric Interior Lighting  
Road  
Bridge  
Floodlighting, Wall washing for bars, clubs, hotels, stages, parks, plazas Commercial buildings facade, mosques, museums, and art galleries.

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



## High Lumen LED Spot Light



### Description

Housing is made of die-cast aluminum good heat dissipation

White, black, silver finish are available, other special finish please confirm with factory

Special outdoor powder coating ensure good corrosion resistance

High power and good quality reflector bring you superior lighting conditions

IP65

Idea for gymnasium, super market, residential housings outdoor projects and so on. It will bring you a colorful and beautiful world

Tempered glass safe to use

### Features

Multiple light colors can make a colorful world


Can be used with a RGB controller which can bring you more colorful effects

Using OSRAM LED chips

Energy saving and environment friendly

Easy installation

### Installation

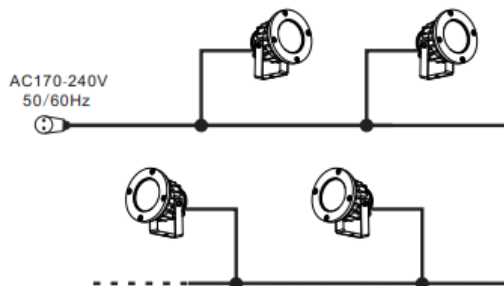

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

TEL: +86-757-8180 8687

E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)

Specifications subject to change w/o notice

FAX: +86-757-8180 8685

Website: [www.liteharbor.com](http://www.liteharbor.com)

Revision: Jan. 2014



# Liteharbor Lighting Technology Co., Ltd.

Item No.: LD-001

---

15pcs max

## Safety Instruction

Do not install the fixture to the place where it incombustible and explosive

During the transportation please ensure the packing is good enough is good enough

Check the electronic parameters first before installation

## LEDs

Epistar LED chip

Length of wire doing according to customers' needs

Input: 120V-277V

Wattage Output: 5W

Quantity of LEDS: 5pcs

Working temperature:-20-55°C

---

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



# Liteharbor Lighting Technology Co., Ltd.

Item No.: LD-002

---

## Mini LED Spot Light



### Description

Housing is made of die-cast aluminum good heat dissipation

White, black, silver finish are available, other special finish please confirm with factory

Special outdoor powder coating ensure good corrosion resistance

High power and good quality reflector bring you superior lighting conditions

IP65

Idea for gymnasium, super market, residential housings outdoor projects and so on. It will bring you a colorful and beautiful world

Glass cover

### Features

Multiple light colors can make a colorful world

Can be used with a RGB controller which can bring you more colorful effects

Using Epistar LED chips

Energy saving and environment friendly

Easy installation

### Installation



Using the screws secure the fixture first

---

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**



# Liteharbor Lighting Technology Co., Ltd.

Item No.: LD-002



Connect fixtures together the max quantity is 15pcs

## Safety Instruction

Do not install the fixture near to the place where it incombustible and explosive

During the transportation please ensure the packing is good enough

Check the parameters first before installation

## LEDs

Epistar LED chip

Length of wire doing according to customers' needs

Input: 120V-277V

Wattage Output: 3W

Quantity of LEDS: 50pcs

Working temperature:-20-55°C

---

**Add: New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China**

**TEL: +86-757-8180 8687**

**E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)**

**Specifications subject to change w/o notice**

**FAX: +86-757-8180 8685**

**Website: [www.liteharbor.com](http://www.liteharbor.com)**

**Revision: Jan. 2014**