


4" Fluorescent IC Airtight Double Wall New Construction Housing

Catalog #	AF4D-IA	Prepared by	LiteHarbor
Project		Date	Jan.1st,2015
Notes			

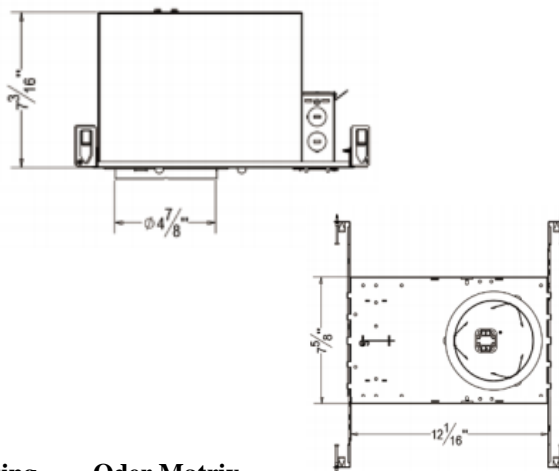

4" Fluorescent IC Airtight Double Wall New Construction Housing

Order Matrix

A B C D E

Housing

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation and suitable for using in non-insulation covered or non-insulation covered ceilings
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.

Hanger Bar

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

Loose Socket Plate

Free floating socket clips directly to trim for precise lamp

A	Series
AF4D-IA	4"/Line Vol./New Construction IC Airtight Fluorescent Double Wall

B	Ballast
	No Ballast
E	Electronic Ballast
DE	Dimmable Electronic Ballast

C	Input Voltage
	120V
277	277V

D	Wattage
F13	Fluorescent 13W
F18	Fluorescent 18W
F26	Fluorescent 26W

RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.
 New Industry Area Hecun Danzao Town
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
 FAX: +86-757-8180 8685
 E-mail: info@liteharbor.com

Website: www.liteharbor.com
 Specifications subject to change w/o notice
 Revision: Jan. 2015

replacement, optical performance and uniformity from
fixture to fixture

Ballast

- 1) Thermally protected
- 2) Electronic ballast provide full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Meet FCC EMT/FRI consumer limits
- 6) Attached to junction box cover so it may be serviced
from below the ceiling no tools required

Lamp

13/18/26W 4-Pin DTT/TRT(See trim for max wattage)

Unversal GX24 4-PIN

CRI>80%

PF:0.9-1.0

Color Temperature:2800K-6500K

E	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Jan. 2015

4" TRIM OPTIONS



BF4002

4" Fluorescent Reflector Trim

Lamp: 1X13/18/26W TRT



BF4026

4" Fluorescent Wall Washer Trim

Lamp: 1X13/18/26W TRT



BF4302

4" Fluorescent Shower Trim With Fresnel Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4402

4" Fluorescent Shower Trim With Albalite Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4502

4" Fluorescent Shower Trim With Drop Opal

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4602

4" Fluorescent Shower Trim With Dome Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4702

4" Fluorescent Shower Trim With Frosted Clear In Centre Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4802

4" Fluorescent Shower Trim With Frosted Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015



BF4001M

4" Fluorescent Baffle Trim

Lamp: 1X13/18/26W TRT



BF4002M

4" Fluorescent Reflector Trim

Lamp: 1X13/18/26W TRT



BF4026M

4" Fluorescent Wall Washer Trim

Lamp: 1X13/18/26W TRT



BF4302M

4" Fluorescent Shower Trim With Fresnel Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4402M

4" Fluorescent Shower Trim With Albalite Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4502M

4" Fluorescent Shower Trim With Drop Opal

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4602M

4" Fluorescent Shower Trim With Dome Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4702M

4" Fluorescent Shower Trim With Frosted Clear In Centre Lens

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015



BF4802M

**4" Fluorescent Shower Trim
With Frosted Lens**

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4002S

4" Fluorescent Reflector Trim

Lamp: 1X13/18/26W TRT



BF4026S

**4" Fluorescent Wall Washer
Trim**

Lamp: 1X13/18/26W TRT



BF4302S

**4" Fluorescent Shower Trim
With Fresnel Lens**

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4402S

**4" Fluorescent Shower Trim
With Albalite Lens**

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4502S

**4" Fluorescent Shower Trim
With Drop Opal**

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4602S

**4" Fluorescent Shower Trim
With Dome Lens**

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



BF4702S

**4" Fluorescent Shower Trim
With Frosted Clear In Centre
Clear Incentre Lens**

Lamp: 1X13/18W TRT

Gasket used to prevent moisture
Wet location listed



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015



BF4802S

**4" Fluorescent Shower Trim
With Frosted Lens**

Lamp: 1X13/18W TRT

Gasket used to prevent moisture

Wet location listed



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015