


AF5-R
5 inch Compact Fluorescent Remodel
Non-IC Recessed Housing

| | | | |
|------------------|--|--------------------|------------|
| Catalog # | | Prepared by | LiteHarbor |
| Project | | Date | |
| Notes | | | |

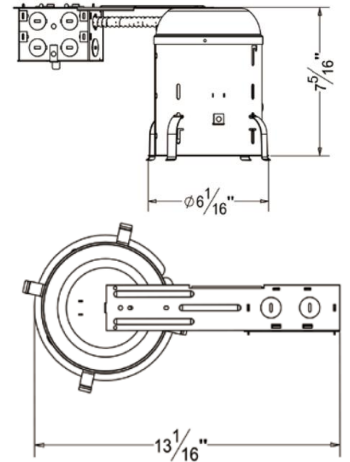

5 inch Compact Fluorescent Remodel Non-IC Recessed Housing

Housing

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for Remodel installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

Ballast

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

Order Matrix

A B C D

| |
|------------------------|
| Item No.: AF5-R |
|------------------------|

| | |
|-------|---|
| A | Series |
| AF5-R | 5"/ Compact Fluorescent Remodel NON-IC Housing |

| | |
|-----|---------------|
| B | Input Voltage |
| | 120V |
| 277 | 277V |

| | |
|-----|---------|
| C | Wattage |
| F13 | CFL 13W |
| F18 | CFL 18W |
| F26 | CFL 26W |

RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.
 New Industry Area Hecun Danzao Town
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
 FAX: +86-757-8180 8685
 E-mail: info@liteharbor.com

Website: www.liteharbor.com
 Specifications subject to change w/o notice
 Revision: Jan. 2015

Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

| D | Color Temperature |
|-----|-------------------|
| 28K | 2800k |
| 35K | 3500K |
| 50K | 5000K |
| 60K | 6000K |

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015

5" TRIM OPTIONS



B5021

5" Clear Reflector Trim with Baffle

Lamp: 13/18/26W TRT



B5022

5" Cone Reflector Trim

Lamp: 13/18/26W TRT



B5300

5" Shower Trim with Fresnel Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5400

5" Shower Trim with Albalite lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5500

5" Shower Trim with Drop Opal Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5600

5" Shower Trim with Dome Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5700

5" Shower Trim with Centre Frosted Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5800

5" Shower Trim with Frosted Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed

RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015