


**AF5-RIA**  
**5 inch Compact Fluorescent Remodel**  
**IC Airtight Recessed Housing**

<b>Catalog #</b>		<b>Prepared by</b>	LiteHarbor
<b>Project</b>		<b>Date</b>	
<b>Notes</b>			

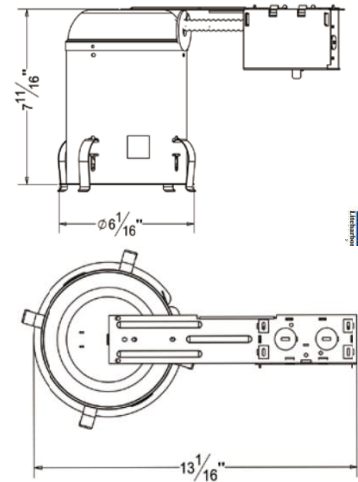

**5 inch Compact Fluorescent Remodel IC Airtight Recessed Housing**

**Housing**

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for Remodel installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.

**Junction Box**

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

**Ballast**

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

**Order Matrix**

**A      B      C      D**

<b>Item No.:AF5-RIA</b>			
-------------------------	--	--	--

	<b>A</b> Series
AF5-RIA	5"/ Compact Fluorescent Remodel IC Airtight Housing

	<b>B</b> Input Voltage
	120V
277	277V

	<b>C</b> Wattage
F13	CFL 13W
F18	CFL 18W

RECESSED DOWNLIGHT



**Liteharbor Lighting Technology Co., Ltd.**  
 New Industry Area Hecun Danzao Town  
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675  
 FAX: +86-757-8180 8685  
 E-mail: info@liteharbor.com

Website: www.liteharbor.com  
 Specifications subject to change w/o notice  
 Revision: Jan. 2015

### Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

D	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

### Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory



RECESSED DOWNLIGHT



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015

## 5" TRIM OPTIONS



### B5021

**5" Clear Reflector Trim with Baffle**

**Lamp:** 13/18/26W TRT



### B5022

**5" Cone Reflector Trim**

**Lamp:** 13/18/26W TRT



### B5300

**5" Shower Trim with Fresnel Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.

Wet location listed



### B5400

**5" Shower Trim with Albalite lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.

Wet location listed



### B5500

**5" Shower Trim with Drop Opal**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.

Wet location listed



### B5600

**5" Shower Trim with Dome Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.

Wet location listed

RECESSED DOWNLIGHT



### B5700

**5" Shower Trim with Centre Frosted Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.

Wet location listed



### B5800

**5" Shower Trim with Frosted Lens**

**Lamp:** 13/18W TRT

Gasket used to prevent moisture.

Wet location listed



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015