


AF5
5 inch Compact Fluorescent New
Construction Non-IC Recessed
Housing

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

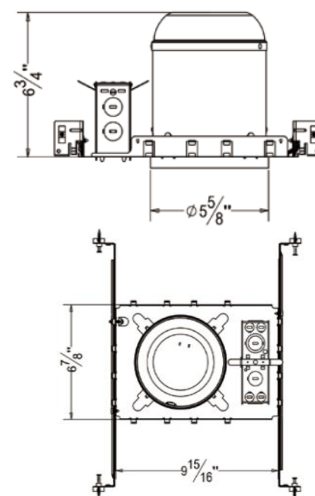

5 inch Compact Fluorescent New Construction Non-IC Recessed Housing

Housing

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for New Construction installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Hanger Bar

- 1) Allow housing to be positioned and locked at any point within a 24" joist span.
- 2) Can be shortened for 12" joists
- 3) Can be positioned on long or short axis of the housing
- 4) Contain integral nail
- 5) Hanger fit onto T-bar spline for quick alignment

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

Order Matrix

A B C D

Item No.:AF5

A	Series
AF5	5"/ Compact Fluorescent New Construc NON-IC Housing

B	Input Voltage
	120V
277	277V

C	Wattage
F13	CFL 13W
F18	CFL 18W
F26	CFL 26W



Liteharbor Lighting Technology Co., Ltd.
 New Industry Area Hecun Danzao Town
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
 FAX: +86-757-8180 8685
 E-mail: info@liteharbor.com

Website: www.liteharbor.com
 Specifications subject to change w/o notice
 Revision: Jan. 2015

RECESSED DOWNLIGHT

Ballast

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

D	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015

5" TRIM OPTICS



B5021

5" Clear Reflector Trim with Baffle

Lamp: 13/18/26W TRT



B5022

5" Cone Reflector Trim

Lamp: 13/18/26W TRT



B5300

5" Shower Trim with Fresnel Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5400

5" Shower Trim with Albalite lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5500

5" Shower Trim with Drop Opal

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5600

5" Shower Trim with Dome Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5700

5" Shower Trim with Centre Frosted Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed



B5800

5" Shower Trim with Frosted Lens

Lamp: 13/18W TRT

Gasket used to prevent moisture.
Wet location listed

RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015