


AF6-R
6 inch Compact Fluorescent Remodel
Non-IC Recessed Housing

| | | | | |
|------------------|--|--------------------|--|-------------------|
| Catalog # | | Prepared by | | LiteHarbor |
| Project | | Date | | |
| Notes | | | | |

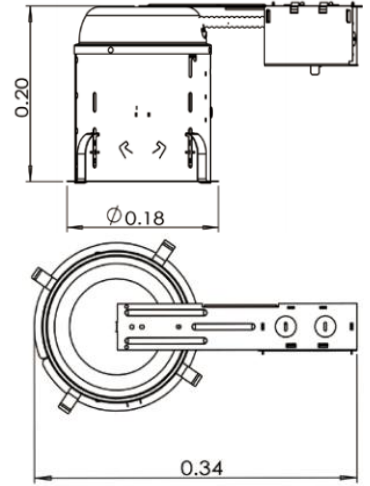

6 inch Compact Fluorescent Remodel Non-IC Recessed Housing

Order Matrix

A B C D

| |
|------------------------|
| Item No.: AF6-R |
|------------------------|

| | |
|----------|---|
| A | Series |
| AF6-R | 6"/ Compact Fluorescent Remodel NON-IC Housing |

| | |
|----------|---------------|
| B | Input Voltage |
| | 120V |
| 277 | 277V |

| | |
|----------|---------|
| C | Wattage |
| F18 | CFL 18W |
| F26 | CFL 26W |
| F32 | CFL 32W |

Housing

- 1) Die-formed aluminum for maximum heat dissipation and rust protection
- 2) Designed for Remodel installation
- 3) Housing can be installed in 1/2" to 1-3/8" thick ceilings.
- 4) Housing is Non-IC rated must be kept at least 3" away from insulation

Junction Box

- 1) ETL listed for through branch wiring
- 2) 4 in-4 out J-box
- 3) Designed for straight through conduit runs
- 4) 1/2" and 3/4" romex wiring knockouts

Ballast

- 1) Thermally protected
- 2) Electronic ballast provides full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.
 New Industry Area Hecun Danzao Town
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
 FAX: +86-757-8180 8685
 E-mail: info@liteharbor.com

Website: www.liteharbor.com
 Specifications subject to change w/o notice
 Revision: Jan. 2015

Lamp & Socket

See Trim for max. wattage and lamp

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

| D | Color Temperature |
|-----|-------------------|
| 28K | 2800k |
| 35K | 3500K |
| 50K | 5000K |
| 60K | 6000K |

Listing

ETL listed for damp location W/Feed through

Other Special requirement please confirm with factory



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015

6" COMPACT FLUORESCENT TRIM OPTICS



B6011

6" Full Reflector Baffle Cone Trim
Lamp: 18/26/32W TRT



B6012

6" Clear Reflector With Baffle Lamp: 18/26/32W TRT



B6012W

6" Full Reflector Trim
Lamp: 18/26/32W TRT



B6022

6" Cone Trim With Reflector
Lamp: 18/26/32W TRT



BF6302

6" Shower Trim With Fresnel Lens
Lamp: 13/18/26W TRT
Gasket used to prevent moisture
Wet location listed



BF6402

6" Shower Trim With Albalite Lens
Lamp: 13/18/26W TRT
Gasket used to prevent moisture
Wet location listed



BF6502

6" Shower Trim With Drop Opal Lens
Lamp: 13/18/26W TRT
Gasket used to prevent moisture
Wet location listed



BF6512

6" Clear Specular Reflector With Drop Glass
Lamp: 13/18/26W TRT
Gasket used to prevent moisture
Wet location listed



BF6702

6" Shower Trim With Frosted Spot Lens
Lamp: 13/18/26W TRT
Gasket used to prevent moisture
Wet location listed



BF6800

6" Shower Trim With Sand Blasted Lens
Lamp: 13/18/26W TRT
Gasket used to prevent moisture
Wet location listed



RECESSED DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015