


6 inch Vertical Fluorescent Commercial Housing

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

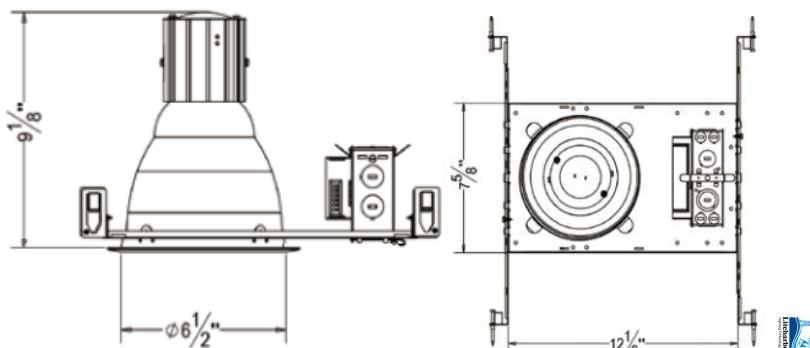

6 inch Vertical Fluorescent Commercial Housing

Mounting

- 1) Constructed from 16-gauge steel
- 2) Fram includes bar hangers with nails for wood joist
- 3) Installed spring steel friction clips
- 4) Adjustable 14"-25" for precise placement
- 5) Bar hangers include T-bar notch for T-grid ceiling installations
- 6) Fully assembled for ease of installation
- 7) Must be kept at least 3" away from insulation

Junction Box

- 1) Pre-wired junction box provided with 1/2" and 3/4" knockouts
- 2) Provided with removable access plates
- 3) Knockouts equipped with pryout slots
- 4) All leads are #18AWG wire, the ground wire connected to the bottom and quick connectors are supplied on all leads
- 5) Through branch circuit wiring(4 in, 4 out)

Reflector

- 1) High quality reflector with 1.2mm thickness available in multiple architectural finishes and types.
- 2) Optional painted white flange is available

Order Matrix

A	B	C	D	E
---	---	---	---	---

A	Series
AF6-VC	6" Vertical Commercial Housing Fluorescent

B	Ballast
	No Ballast
E	Electronic Ballast
DE	Dimmable Electronic Ballast

C	Input Voltage
	120V
277	277V

D	Wattage
F26	CFL 26W
F32	CFL 32W
F42	CFL 42W



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Jan. 2015

- 3) Single position optics eliminate possibility of specified lamp being installed in incorrect position

Ballast

- 1) Thermally protected
- 2) Electronic ballast provide full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

Socket

Universal G24 4-pin

Lamp

13/18/26/32/42W 4 pin

Universal G24 4-PIN

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

Listing

ETL listed for damp location W/Feed through

E	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K

Special Requirements Confirm with Factory



FLUORESCENT COMMERCIAL LIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com


Specifications subject to change w/o notice

Revision: Jan. 2015



RV6002

6 inch Vertical Reflector
Self Flanged/White Ring



RC602

6 inch Vertical Reflector with
Regressed Lens
Self Flanged/White Ring



RC603

6 inch Vertical Baffle with
Regressed Lens
Self Flanged/White Ring



RC608

6 inch Vertical Cross Blade
White Ring



RV612

6 inch Vertical Reflector with
Baffle
White Ring



RC166

6 inch Vertical Reflector with
Drop Glass
Self Flanged



COMMERCIAL HOUSING



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015

