
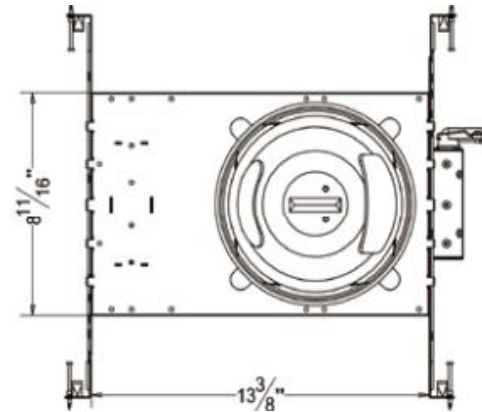


8 inch Horizontal Fluorescent Commercial Housing

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

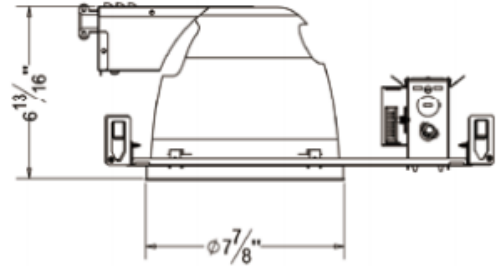

8 inch Horizontal Fluorescent Commercial Housing

Mounting

- 1) Constructed from 16-gauge steel
- 2) Frame includes bar hangers with nails for wood joist
- 3) Installed spring steel friction clips
- 4) Adjustable 14"-25" for precise placement
- 5) Bar hangers include T-bar notch for T-grid ceiling installations
- 6) Fully assembled for ease of installation
- 7) Must be kept at least 3" away from insulation

Junction Box

- 1) Pre-wired junction box provided with 1/2" and 3/4" knockouts
- 2) Provided with removable access plates
- 3) Knockouts equipped with pry out slots
- 4) All leads are #18AWG wire, the ground wire connected to the bottom and quick connectors are supplied on all leads
- 5) Through branch circuit wiring (4 in, 4 out)

Reflector

- 1) High quality reflector with 1.2mm thickness available in multiple architectural finishes and types.
- 2) Optional painted white flange is available

Order Matrix

A **B** **C** **D** **E**

A	Series
AF8-HC	8" Horizontal Commercial Housing Fluorescent

B	Ballast
	No Ballast
E	Electronic Ballast
DE	Dimmable Electronic Ballast

C	Input Voltage
	120V
277	277V



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Jan. 2015



COMMERCIAL HOUSING

- 3) Single position optics eliminate possibility of specified lamp being installed in incorrect position

Ballast

- 1) Thermally protected
- 2) Electronic ballast provide full light output and rated lamp life
- 3) Flicker free and noise free operation and starting
- 4) End of lamp life protection is standard
- 5) Attached to junction box cover so it may be serviced from below the ceiling no tools required

Socket

Unversal G24 4-pin

Lamp

2*13/2*18/2*26/2*32/2*42W 4 pin

Universal G24 4-PIN

CRI>80%

PF>0.9

Color Temperature:2800K-6500K

Listing

ETL listed for damp location W/Feed through

D	Wattage
F26	CFL 26W
F32	CFL 32W
F213	CFL 2X13W
F218	CFL 2X18W
F226	CFL 2X26W

E	Color Temperature
28K	2800k
35K	3500K
50K	5000K
60K	6000K



Special Requirements Confirm with Factory

COMMERCIAL HOUSING




RH8002

8 inch Horizontal Reflector
Self Flanged/White Ring



RC811

8 inch Horizontal Reflector with
Baffle
White Ring



RC812

8 inch Horizontal Reflector with
Regressed Lens
Self Flanged/White Ring



RC813

8 inch Horizontal Baffle with
Regressed Lens
White Ring



RC814

8 inch Horizontal Cross Blade
White Ring



RCH188

8 inch Horizontal Reflector with
Drop Glass
Self Flanged



COMMERCIAL HOUSING



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015