
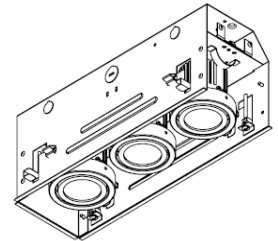
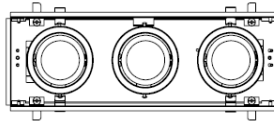



# Trim or Trimless Residential Mini Multiple Downlight

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

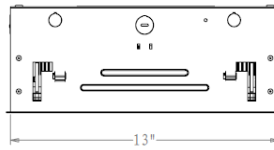

## ORDER MATRIX | Example: G4013-E-R-COB

A    B    C    D

A	Series
G4011-E-R-COB	1-Lamp
G4012-E-R-COB	2-Lamp
G4013-E-R-COB	3-Lamp
G4014-E-R-COB	4-Lamp

B	Input Voltage
U	85-265V AC

C	Available Chips
Cree	Cree
Citizen	Citizen
Epistar	Epistar
Seoul	Seoul
Osram	Osram

### Description

Mini LED Multiple Spots for remodeling and new construction applications for residential and commercial environments. The Multiple Spots are marketed as complete units including the housing and trim. Available as one, two and three-light configurations, each spot is individually adjustable and provides a 30-degree visual cutoff for glare control.

### Features

- Individually adjustable luminaries
- Complete unit includes housing & trim
- All housings are Non-IC rated
- 30 °vertical tilt, 360 °horizontal rotation

### Construction

Die-cast aluminum heat sink painted white. Trim and housing are constructed of Gauge Steel.

### Mounting

Available in 12.7mm-38.1mm thick ceilings  
 Fix the lamp by locking screw From below the ceiling  
 When Installing or removing the fixture, it won't damage the ceilings



MULTIPLE DOWNLIGHT



**Liteharbor Lighting Technology Co., Ltd.**  
 New Industry Area Hecun Danzao Town  
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675  
 FAX: +86-757-8180 8685  
 E-mail: info@liteharbor.com

Website: www.liteharbor.com  
 Specifications subject to change w/o notice  
 Revision: Jan. 2015

D	Color Temperature
27K	2700K
30K	3000K
35K	3500K
41K	4100K
65K	6500K

### Light Source

High output COB LED Chips

### Dimming





Dimmable to 10% with most brand dimmers.

Input Voltage	AC 85-265V 50/60Hz
Rated Power	10/Lamp
Luminous Efficiency	70 LM/W
Lamp	COB
Color Temperature	2700-6500K
Material	Gauge Steel
Power Factor	> 0.98
CRI	Ra80 / Ra90





### View More



1-Light  
G4011-E-R-COB



2-Light  
G4012-E-R-COB



MULTIPLE DOWNLIGHT



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675





FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015

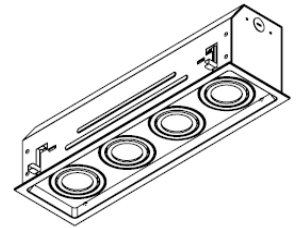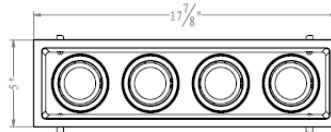

4-Light  
G4014-E-R-COB



Hollow



Closed




**Option 1**

Universal hollow open flanged design  
Strong welding make a stable structure

**Option 2**

Special closed flanged design without seeing the body inside  
One forming without welding spot make a better effect overall

MULTIPLE DOWNLIGHT

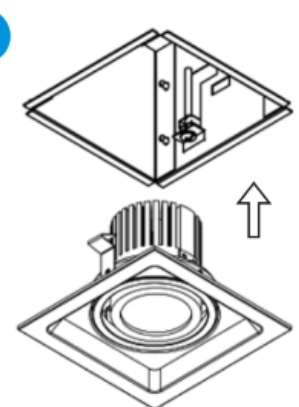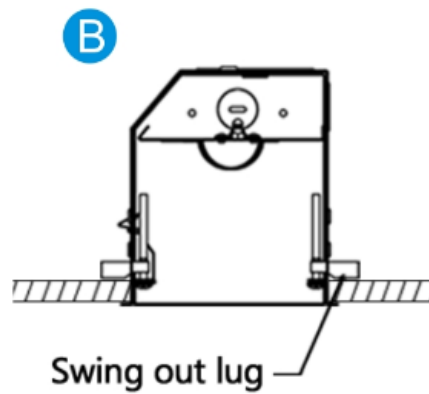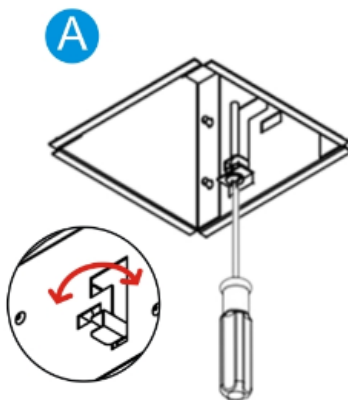

**INSTALLATION INSTRUCTION**



**Liteharbor Lighting Technology Co., Ltd.**  
New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675  
FAX: +86-757-8180 8685  
E-mail: info@liteharbor.com

Website: www.liteharbor.com  
Specifications subject to change w/o notice  
Revision: Jan. 2015