

# 4" Round Or Square Recessed LED Retrofit Trim

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



## ORDER MATRIX | Example:BL4-921

<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>
	A	Series				
BL4-921		4" Round Recessed LED Retrofit Trim				
BL4-921-S		4" Square Recessed LED Retrofit Trim				
	B	Mounting				
		Remodel				
		New Construction				
	C	Trim				
		Trimmed				
		Trimless				
	D	Finish				
WH		White				
BK		Black				
SN		Satin Nickel				
	E	Mounting Clips				
		Optional①				
		Optional②				
		Optional③				
		Optional④				

(Reference to the following page)

## Description

Use cold forging radiator with good heat dissipation. Peculiar vortex type outlet, to ensure that the light is soft, avoid glare, unique irregular shape make an impression. Independent power supply box, easy to maintain and replace. Brand chip and isolated power supply, safe and reliable. Dimming available, can be matched a variety of light regulator. dimming stability, no strobe. Square outer ring is optional.

## Mounting & Clips

New construction is optional. Can be adapted to the 0.5 "to 1.5" ceiling. Easy installation, tool-free and save time. Various installation clip for choose. Two Clips Type: Install with no housing required. Three Clips Type: Install with housing required.

## Light Engine

COB LED  
Input Power: 12W Max.  
Input Voltage: 110V/277V AC 50/60 Hz  
PF: >0.98  
CRI:80+/90+  
CCT: 2700-6000K  
None Dimmable or TRIAC Dimmable  
Lumen Efficiency: 100lm/W



LED RETROFIT TRIM



**Liteharbor Lighting Technology Co., Ltd.**  
New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675  
FAX: +86-757-8180 8685  
E-mail: info@liteharbor.com

Website: www.liteharbor.com  
Specifications subject to change w/o notice  
Revision: Dec. 2016

F	Color Temperature
27K	2700K
30K	3000K
40K	4000K
50K	5000K
60K	6000K
G	Dimmable
	Non-Dimmable
DM	Dimmable

### Listing & Warranty

ETL listed to US and Canadian standards for wet locations  
5-Year Limited Warranty

### Packing

CTN Size: L:565×W:425×H:265mm  
Inner Box Size: L:135×W:135×H:120mm  
24PCS/CTN


### Mounting Clips Optional

①②③④


#### Square Shape



Optional①  
Three Clips  
Housing is required

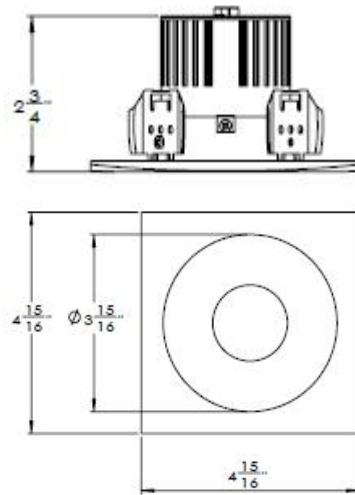

Optional②  
Two Clips  
No housing required

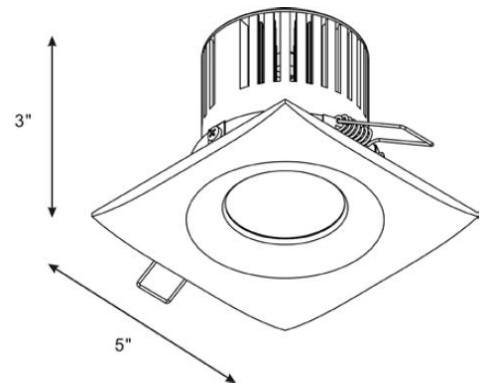

LED RETROFIT TRIM



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675


FAX: +86-757-8180 8685

E-mail: info@liteharbor.com


Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Dec. 2016

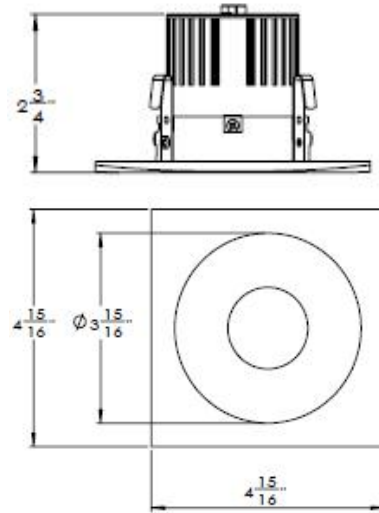

Optional③  
Three Clips  
Housing is required

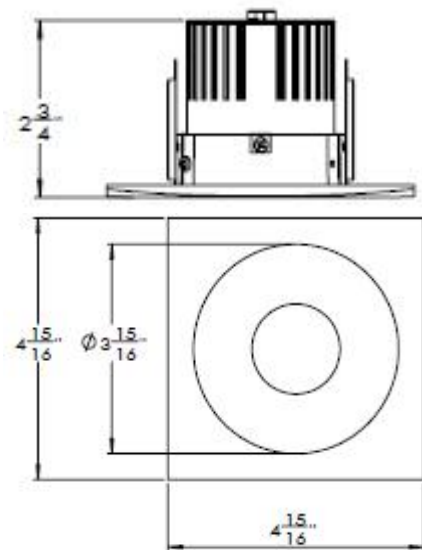


Optional④  
Two Clips  
Housing is required




## Round Shape



Optional ①  
Three Clips  
Housing is required

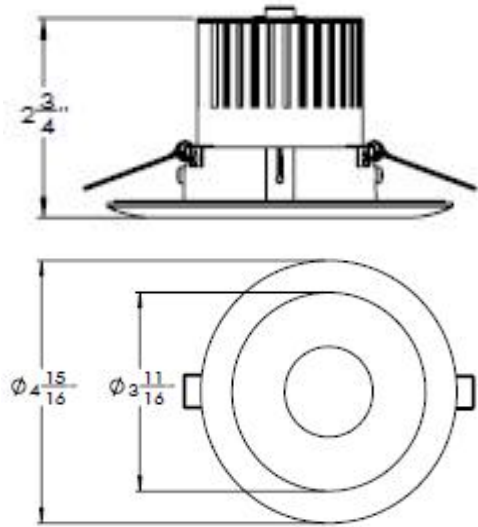


Optional ②  
Two Clips  
No housing required

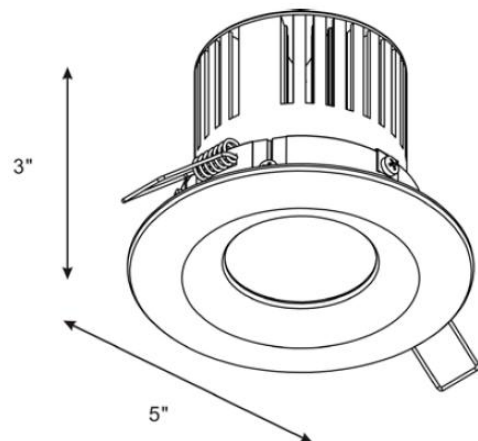



Optional③  
Three Clips  
Housing is required

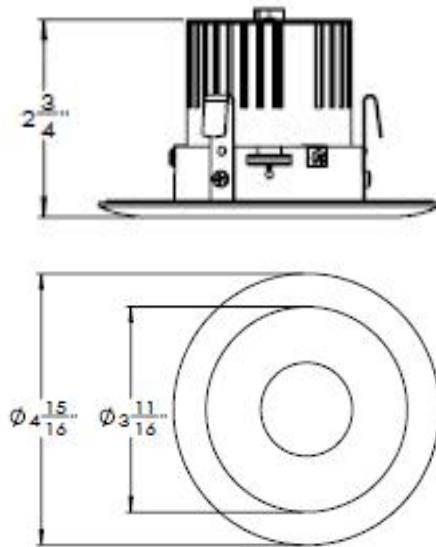

Optional④  
Two Clips  
Housing is required

