


PENDENT GU10 BLUETOOTH MULTIPLE DOWNLIGHT

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



G4012-M-GU10

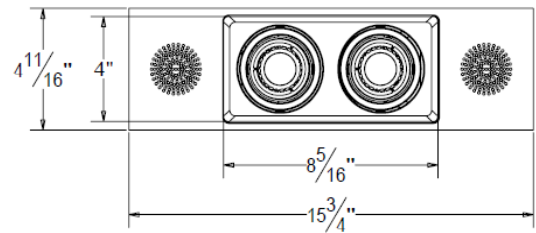

ORDER MATRIX | Example: G401X-M-GU10

A B C D E

A	Series
G4011-M-GU10	1 Lamp
G4012-M-GU10	2 Lamp
G4013-M-GU10	3 Lamp
G4014-M-GU10	4 Lamp

B	Watt
LED	8W/Lamp

C	Input Voltage
120	120V
277	277V
U	120V-277V

Description

Mini LED Multiple Spots for remodeling and new construction applications for residential and commercial environments. The Multiple Spots are marketed as complete units including the housing and trim. Available as one, two and three-light configurations, each spot is individually adjustable and provides a 30-degree visual cutoff for glare control.

Features

- This product, all-metal material, thick, stable, combined with Bluetooth Speaker, even more stylish and beautiful.
- Pendant and ceiling mounting series multiple downlight equipped with one lamp, two lamp, three lamp and four lamp.
- Each lamp can up and down around the rotation.
- 30 °vertical tilt, 360 °horizontal rotation. 30 °anti glare control
- Whether it is ceiling installation or pendant installation, it has played a very good decorative effect.
- Light bulbs can be directly removed from the bottom without the tool, no need to remove the lamp down and then replace, save time and effort.
- Can add Bluetooth stereo, the light combination with the music, add life fun.

PENDENT MULTIPLE DOWNLIGHT



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Mar. 2017

D	Color Temperature
27	2700K
30	3000K
35	3500K
40	4000K
50	5000K

E	Luminous Efficiency
750	750LM/Lamp

Data

Light Source: LED GU10
 Power Factor: >0.98
 Material: Gauge Steel
 Frequency: 50/60Hz
 CRI: Ra>80/90

Dimming

Dimmable to 10% with most brand dimmers.

Construction

Trim and housing are constructed of Gauge Steel.

Mounting

Ceiling mount or pendent mount.

Warranty

Five Year Limited Warranty.

Precautions

To ensure proper operation of the product, make sure that the voltage at the time of use is within the indicated voltage range. Please disconnect the power supply when installing and disassembling the product to avoid the risk of electric shock. Do not use this product in high humidity or dusty environments. Do not look at the LED light source for a long time, high intensity light source may cause eye damage. When you find the following questions, please contact the ualified electrician for repair services: The product produces a foul smell, an abnormal sound, or an unusual flicker. Shell damage, foreign invasion of internal.

