


Die-cast Aluminum Round/Square LED Pendant Light

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

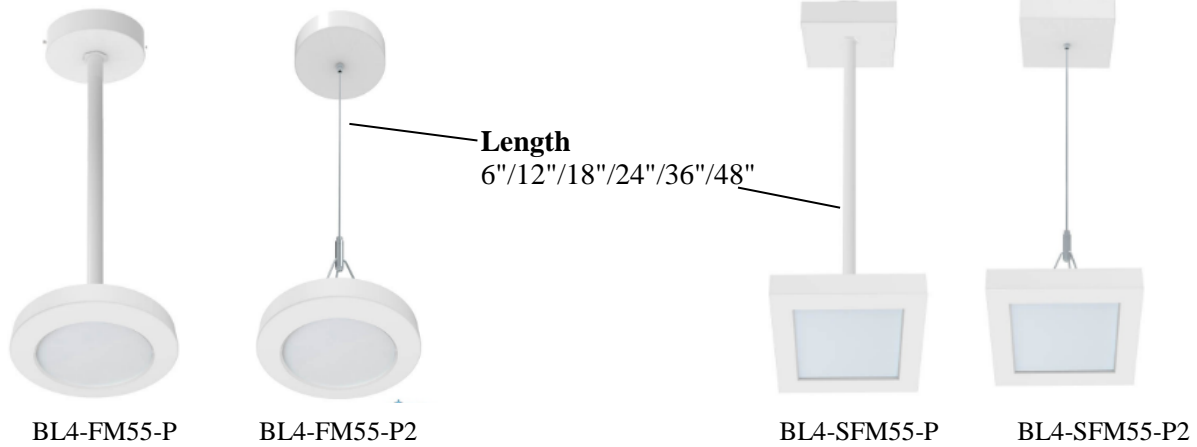

ORDER MATRIX | Example:BL6-FM7-P

<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>
	A	Series				
BL4-FM55-P	Round LED Pendant Mount					
BL4-SFM55-P2	Square LED Suspended Mount					
BL4-SFM55-P	Round LED Pendant Mount					
BL4-SFM55-P2	Square LED Suspended Mount					
	B	Input Voltage				
	110V					
	277	277V				
	C	Dimmable				
	Non-Dimmable					
	DM	Dimmable				
	D	LED Available				
	Cree	Cree				
	Citizen	Citizen				
	Epistar	Epistar				
	Seoul	Seoul				
	Osram	Osram				

Description

An architecturally pleasing, easy to install and low profile slim LED pendant mount round and square aperture downlighting.

Slim line, light weight and sleek look, provides more uniform light and an instant on.

It is a low profile pendant light intended for ceiling applications.

Applications

Slim LED Pendant Mount ceiling light is characterized by a completely flat lens with a narrow flange, giving it an architecturally pleasing look.

Can used for all residential and commercial and retail or hospitality high ceiling applications.

Features

Decorative LED Pendant Ceiling Light fixture

Equal to a traditional 50W lamp

80% energy savings

Damp location listed

Easy to install

High Quality Die-cast Aluminum Material



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2017



LED PENDANT LIGHT

E	Lumen
BL4-FM55-P	850lm
BL4-SFM55-P	850lm
BL4-FM55-P2	850lm
BL4-SFM55-P2	850lm

F	Color Temperature
27K	2700K
40K	4000K
50K	5000K
60K	6000K
	Tunable (3000K, 4000K, 5000K, choose any 2 of them)

G	Emergency System
	Without Emergency Battery Backup
EM	With Emergency Battery Backup

LED Light Engine

LED 3030
120V / 277V
10.5W/ 13.5W/ 18.5W
TRIAC Dimmable

Finish

Available in White, Brushed Nickel, and Bronze

Usage


Residential
Office
Retail
Hospitality

Listing & Warranty


3-Year Limited Warranty
ETL listed for North America market!

Dimensions

Ø: 5 1/2" x H: 1"

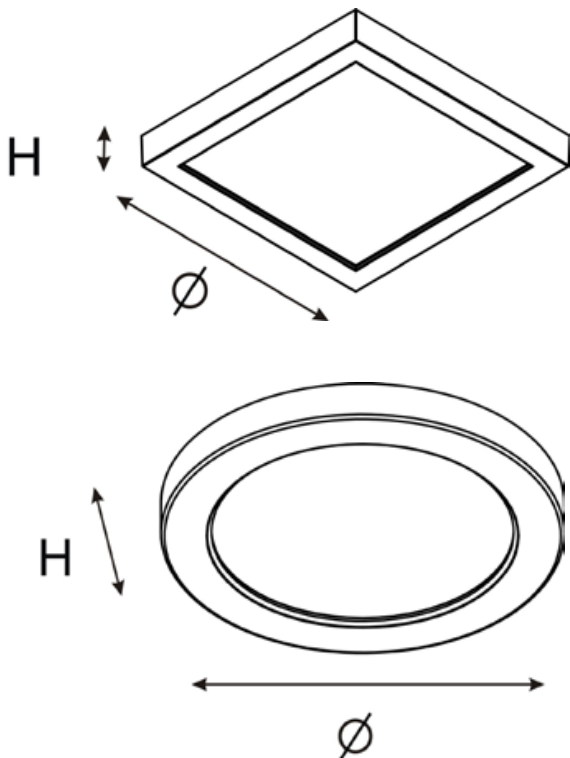

Light Distribution

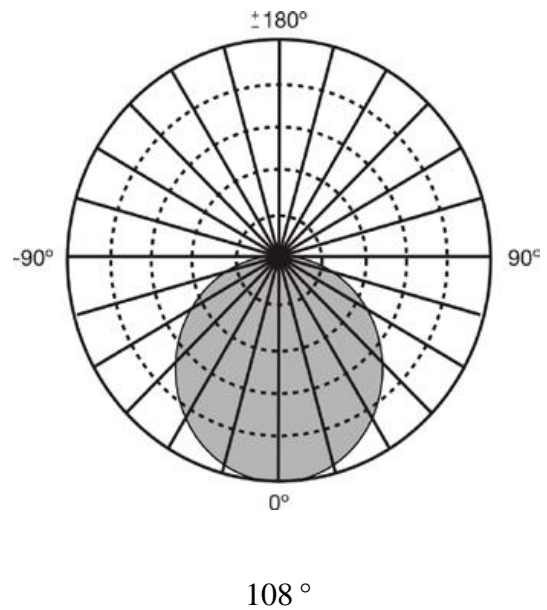

Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2017

Emergency

24 hours recharge time
 >90 minute operation from battery
 over-charge/discharge protection

Dimensions

Ø: 5 1/2"xH:2 3/16"

Ordering Guide

Series	Input Voltage	Dimmable	CCT	Finish	Emergency System
<input type="checkbox"/> BL4-FM55-P 5.5"Round LED Pendant Mount	<input type="checkbox"/> 110V <input type="checkbox"/> 277V	<input type="checkbox"/> Non-Dimmable <input type="checkbox"/> Dimmable	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K <input type="checkbox"/> Tunable (3000K, 4000K, 5000K, choose any 2 of them)	<input type="checkbox"/> White <input type="checkbox"/> Bronze <input type="checkbox"/> Satin Nickel	<input type="checkbox"/> Without Emergency Battery Backup <input type="checkbox"/> With Emergency Battery Backup
<input type="checkbox"/> BL4-SFM55-P 5.5"Square LED Pendant Mount	<input type="checkbox"/> Length <input type="checkbox"/> 6" <input type="checkbox"/> 12" <input type="checkbox"/> 18"				
<input type="checkbox"/> BL4-FM55-P2 5.5"Round LED Pendant Mount	<input type="checkbox"/> 24" <input type="checkbox"/> 36" <input type="checkbox"/> 48"				
<input type="checkbox"/> BL4-SFM55-P2 5.5"Square LED Pendant Mount					



LED PENDANT LIGHT



Liteharbor Lighting Technology Co., Ltd.
 New Industry Area Hecun Danzao Town
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675
 FAX: +86-757-8180 8685
 E-mail: info@liteharbor.com

Website: www.liteharbor.com
 Specifications subject to change w/o notice
 Revision: Jan. 2015