

# Die-cast aluminum LED Pendant Light

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



PD-BL-FM3C



PD-BL-FM3C-S



PD-BL-SFM3C



PD-BL-SFM3C-S

## ORDER MATRIX | Example:PD-BL-FM3C

A	B	C	D	E	F	G
A		Series				
PD-BL-FM3C	Round LED Pendant Mount					
PD-BL-SFM3C	Square LED Pendant Mount					
PD-BL-FM3C-S	Round LED Suspended Mount					
PD-BL-SFM3C-S	Square LED Suspended Mount					
B		Input Voltage				
		110V				
		277V				
C		Dimmable				
		Non-Dimmable				
DM		Dimmable				
D		LED Available				
Cree	Cree					
Citizen	Citizen					
Epistar	Epistar					
Seoul	Seoul					
Osram	Osram					

## Description

An architecturally pleasing, easy to install and low profile slim LED pendant mount round and square aperture downlighting.

Slim line, light weight and sleek look, provides more uniform light and an instant on.

It is a low profile pendant light intended for ceiling applications

## Applications

Slim LED Pendant Mount ceiling light is characterized by a completely flat lens with a narrow flange, giving it an architecturally pleasing look.

Can used for all all residential and commercial and retail or hospitality high ceiling applications.

## Features

Decorative LED Pendant Ceiling Light fixture

80% energy savings

Damp location listed

Easy to install

Die cast aluminum material



LED PENDANT LIGHT



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Apr. 2017

E	Color Temperature
27K	2700K
40K	4000K
50K	5000K
60K	6000K

F	Emergency System
	Without Emergency Battery Backup
EM	With Emergency Battery Backup

G	Length
6	6"
12	12"
18	18"
24	24"
36	36"
48	48"

### LED Light Engine

LED 3030  
 120V / 277V  
 10.5W/13.5W/18.5W=42.5W  
 100lm/W  
 TRIAC Dimmable

### Finish

Available in White, Brushed Nickel, and Bronze

### Usage


Residential  
 Office  
 Retail  
 Hospitality

### Listing & Warranty


3-Year Limited Warranty  
 ETL listed for North America market!

### Dimensions

Ø: 9"xH:1"

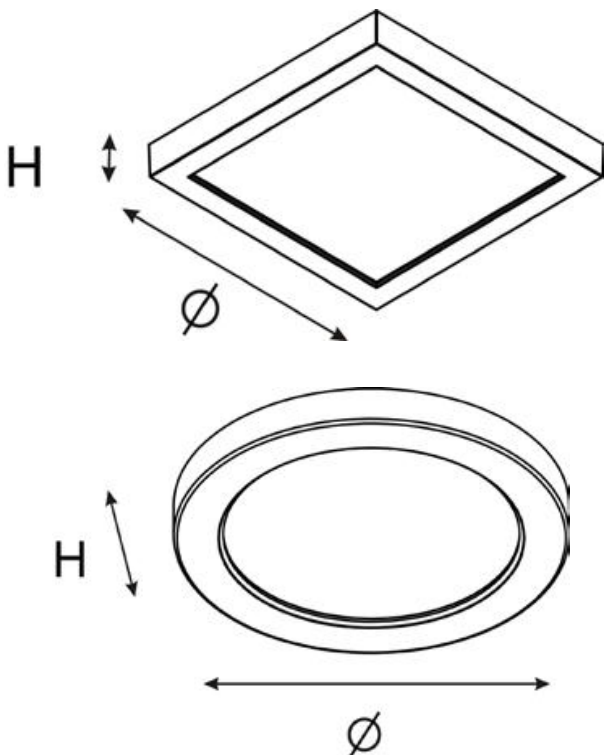

### Light Distribution

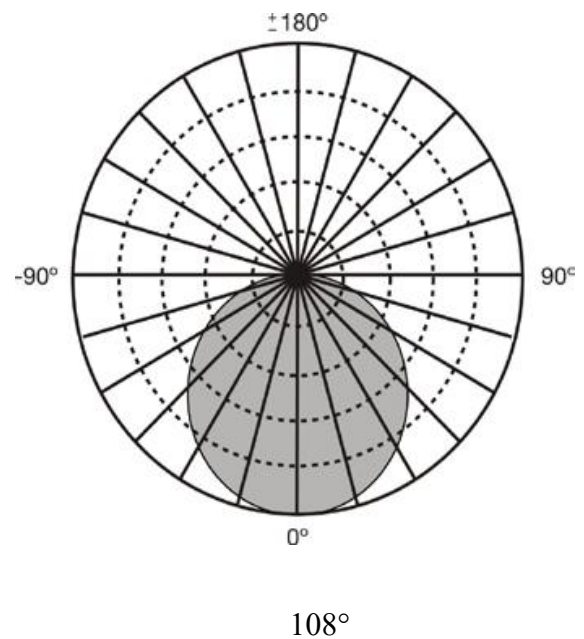

**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
 Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)

Website: [www.liteharbor.com](http://www.liteharbor.com)

Specifications subject to change w/o notice

Revision: Apr. 2017

## Emergency


24 hours recharge time  
>90 minute operation from battery  
over-charge/discharge protection

## Dimensions

Ø: 9"xH:2 3/16"

## Ordering Guide

Series	Input Voltage	Dimmable	CCT	Finish	Emergency System
<input type="checkbox"/> PD-BL-FM3C	<input type="checkbox"/> 110V	<input type="checkbox"/> Non-Dimmable	<input type="checkbox"/> 2700K	<input type="checkbox"/> White	<input type="checkbox"/> Without Emergency
<input type="checkbox"/> PD-BL-SFM3C	<input type="checkbox"/> 277V	<input type="checkbox"/> Dimmable	<input type="checkbox"/> 3000K	<input type="checkbox"/> Bronze	Battery Backup
<input type="checkbox"/> PD-BL-FM3C-S			<input type="checkbox"/> 4000K	<input type="checkbox"/> Satin Nickel	<input type="checkbox"/> With Emergency
<input type="checkbox"/> PD-BL-SFM3C-S			<input type="checkbox"/> 5000K		Battery Backup
			<input type="checkbox"/> 6000K		

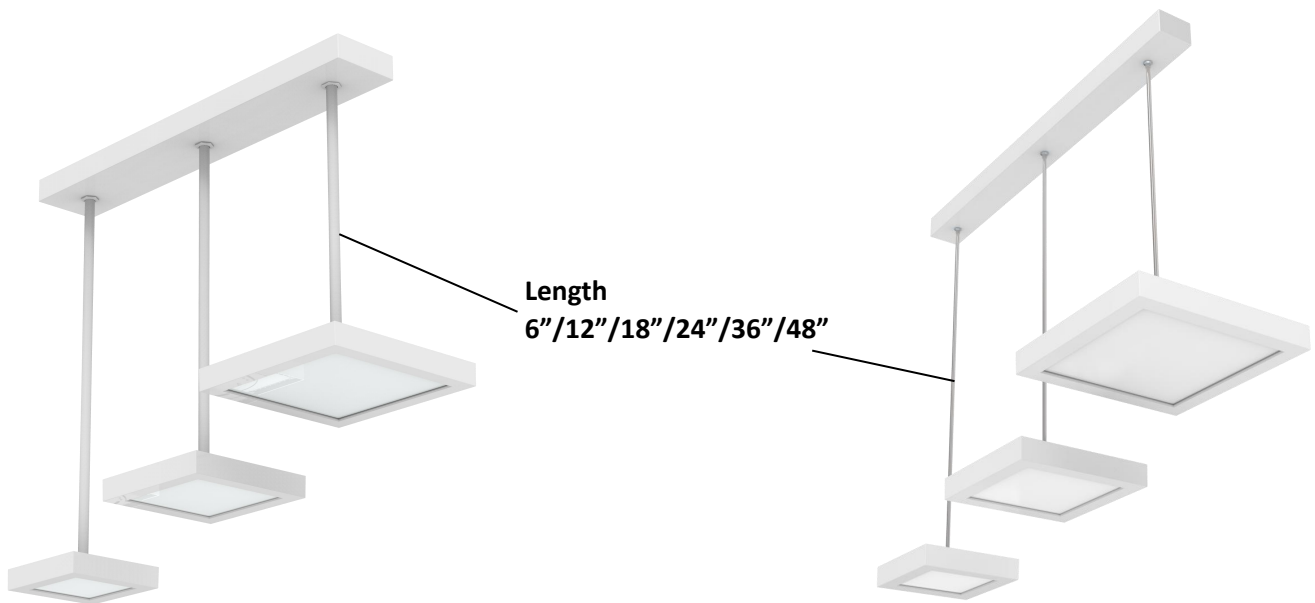

LED PENDANT LIGHT



**Liteharbor Lighting Technology Co., Ltd.**

New Industry Area Hecun Danzao Town  
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: [info@liteharbor.com](mailto:info@liteharbor.com)

Website: [www.liteharbor.com](http://www.liteharbor.com)

Specifications subject to change w/o notice

Revision: Apr. 2017