


# **DG5216**LED FLOOD LIGHT





### **DESCRIPTION**

- The circular is used as the main design, and the lamps as a whole exhibit mechanical elements, so as to achieve a sleek, exquisite and flexible purpose.
- 4mm tempered clear glass, light transmittance up to 95%, reduce the light loss.
- The lamp is composed of a lamp body, a front end cover and a rear end cover, both of which are installed with a screw structure, and at the same time, the installation screws are hidden, and the appearance is beautiful.
- Reasonable heat dissipation design, high density precision die casting aluminum lamp body, ensure the life of lamp.
- Adopt brand LED light source.
- Outdoor professional static outdoor plastic powder sprayed on surface, anti-UV, anti-corrosion and weather resistance is strong.
- Lighting structure, electrical safety compliance with EN60598 GB7000 standard requirements.
- Electric shock protection: Class I
- IP rating: IP66




L=**Φ**250mm H=164.5mm

UNIQUE MANUAL SWITCH DIMMING, COLOR TEMPERATURE CONTROL FUNCTION: 3CCT (3000K/4500K/6000K)

#### INTELLIGENT LIGHT CONTROL INDUCTION FUNCTION:

THROUGH THE LIGHT SENSOR INTELLIGENT SWITCH LAMP, NO NEED MANUAL SWITCH.

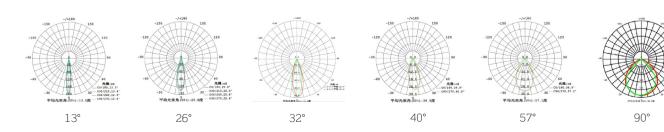












C 0757-8180-8675

www.liteharbor.com

info@liteharbor.com





#### APPLICATION:

Suitable for factories, gymnasiums, wharfs, billboards, buildings, lawn, gardening design and other lighting and decorative lighting places.

# ORDERING GUIDE

Model	Input Voltage	Light Source	Power	Luminous Efficiency	Optional light	Luminous Flux
DG5216	AC100-240V	30 PCS	60W	>100lm/W	15/20/30/45/60/90/120	15000lm
DG5216A	AC100-240V	30 PCS	60W-RGB	>100lm/W	15/20/30/45/60/90/120	20000lm

## OTHER PARAMETERS


Applicable Ambient Temperature	- 3050°C				
Total Harmonic Distortion	< 15%				
Working Temperature	RH10%-90%				
CRI	Ra>75-95 optional				
CCT	3000K 4500K 6000K				
IP Rating	IP 66				
Life Span	>20000h/>30000h/>50000h are optional				
Power Factor	> 0.95				
Frequency Range	50-60Hz				
Electric-shock safeguard	CIASS I				
Mounting	Seat Mounting / Wall Mounting				











**©** 0757-8180-8675 **■** www.liteharbor.com

info@liteharbor.com