



BL12-SFM11 LED CEILING LIGHT

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

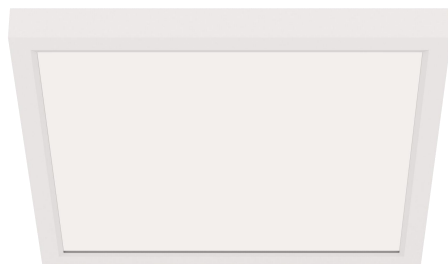

White

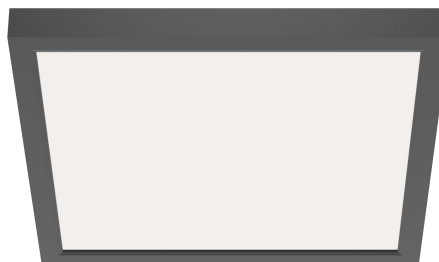

Black



12 Inch Square Shape Flush Mounted LED Ceiling Light

Description

An architecturally pleasing, easy to install and low profile slim LED instant mount round and square aperture downlighting. Slim line, light weight and sleek look, provides more uniform light and an instant on. It is a low profile downlight intended for ceiling or wall mounted applications. This luminaire offers the appearance of a recessed downlight but is actually surface mounted.

Features

- LED 12 inch flush mounted.
- Decorative flush mounted LED fixture.
- 24W equal to a traditional 100W lamp.
- 84% energy savings.
- Damp location listed.
- Mounts directly to 3" and 4" junction boxes.
- Easy to install.

Applications

- Slim LED Flush Mount Downlight is characterized by a completely flat lens with a narrow flange, giving it an architecturally pleasing look.
- This downlighting solution offers an affordable alternative to Air-Seal IC recessed housings or Fire-Rated boxes, reducing material and installation costs.
- Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019

Listing / Warranty

ETL listed to US and Canadian standards for damp location W/Feed through.



3 Year Limited Warranty.

Parameter

Voltage	AC 120V
Frequency	60 Hz
Watt	24W
Dimmable	Non-dimming/TRIAC
CCT	2700-6000K
Material	Aluminum
Finish	White/Black



Dimensions

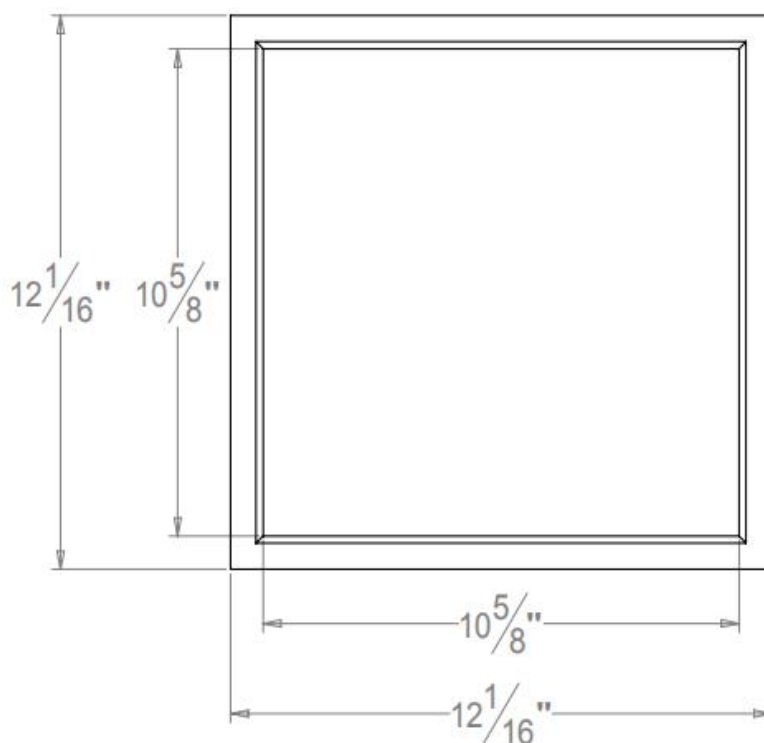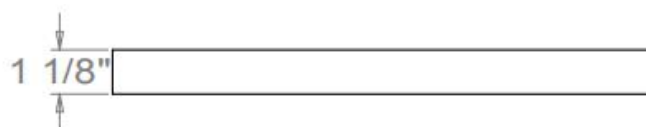

LED CEILING LIGHT



Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019

Ordering Guide

Series/Lumen	Input Voltage	CCT	Dimming
<input type="checkbox"/> BL12-FM11/1900lm LED Ceiling Light	<input type="checkbox"/> 120V	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K <input type="checkbox"/> Tunable *(3000K, 4000K, 5000K, choose any 2 of them)	<input type="checkbox"/> Non-dimming <input type="checkbox"/> TRIAC Dimming
CRI	Finish	Emergency System	
<input type="checkbox"/> 80+ <input type="checkbox"/> 90+	<input type="checkbox"/> White <input type="checkbox"/> Black Brown	<input type="checkbox"/> Without Emergency Battery Backup <input type="checkbox"/> With Emergency Battery Backup	

*Other special requirements please confirm with our factory

