

DGL-ST-3 LED LINEAR LIGHT

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			



LED LINEAR LIGHT

3FT Surface Mounted LED Linear Light

Description

Surface mounted LED wrap combines application flexibility and market leading energy efficiency and controls. The smart durable arc lens design provides smooth uniform light quality and an amazing 110 lumens per watt. The LED wrap features standard 0-10V dimming and optional occupancy sensing which delivers amazing energy savings and controllability.

Features

- This product is a high lumen, thin, beautiful appearance, safe and reliable, convenient installation and easy maintenance linear light.
- 24ga. steel frame provides strength and uniformity
- Suitable for mounting in any orientation: uplight, downlight, wall, can be mounted individually or in continuous rows maximum continuous run is up to 47 luminaires at 120V and 110 luminaires at 277V.
- Isolated constant current drive power supply, safe and stable without stroboscopic guarantee.
- Standard dimming: Continuous dimming to 5% with 0-10V DC control protocol.
- Beam Angle: 120 degree.
- Emergency system is available.
- Available in 1x2, 1x3 and 1x4 models.



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com

Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Jul. 2019

Specifications

- Light Source: Energy-saving 2835 SMD LED light source, multiple CCT optional (2700K-6500K)
- LED Module: Distributed LED array in a variety of lumen output packages. Module is replaceable. Light engine delivers long life and excellent color to ensure a quality, low-maintenance.

Applications

Apply to Hospitality, retail, industrial, commercial, petroleum and etc.


Listing / Warranty

ETL listed to US and Canadian standards for damp location W/Feed through.
5 Year Limited Warranty.

Parameter

Watt	30W
Input Voltage	120V ~ 277V AC
Frequency	50/60 Hz
PF	>0.9
Dimming	Non-dimming/0~10V

Dimension

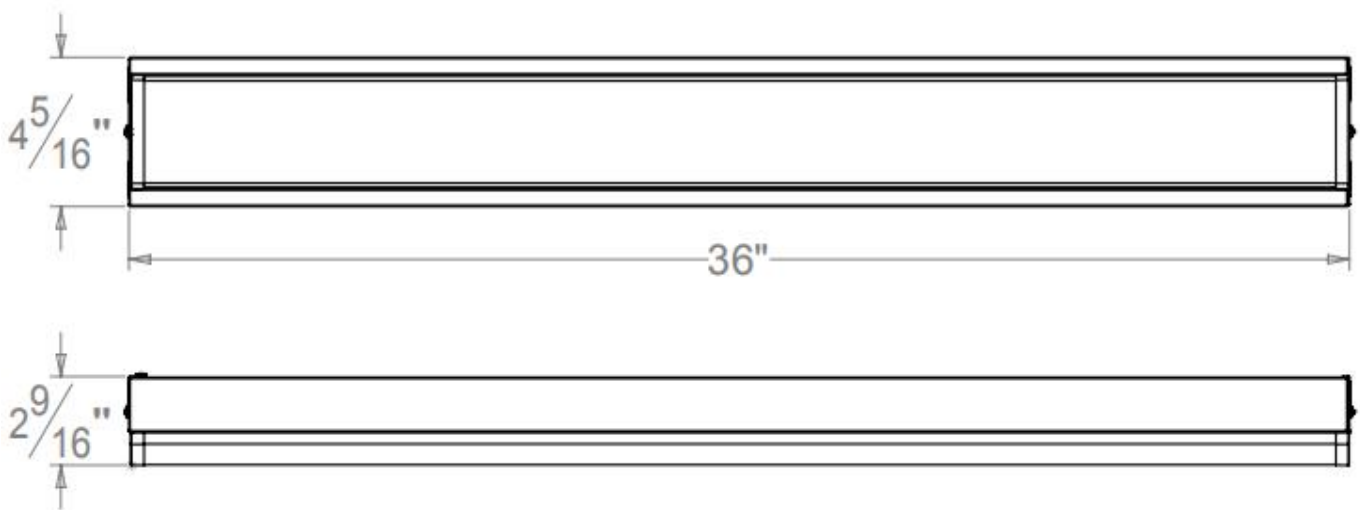

LED LINEAR LIGHT



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687
FAX: +86-757-8180 8685
E-mail: info@liteharbor.com


Website: www.liteharbor.com
Specifications subject to change w/o notice
Revision: Jul. 2019

Package

3FT:

Inner Box: 115x75x925 mm

Outer Container: 93.5x24.5x16.5 cm

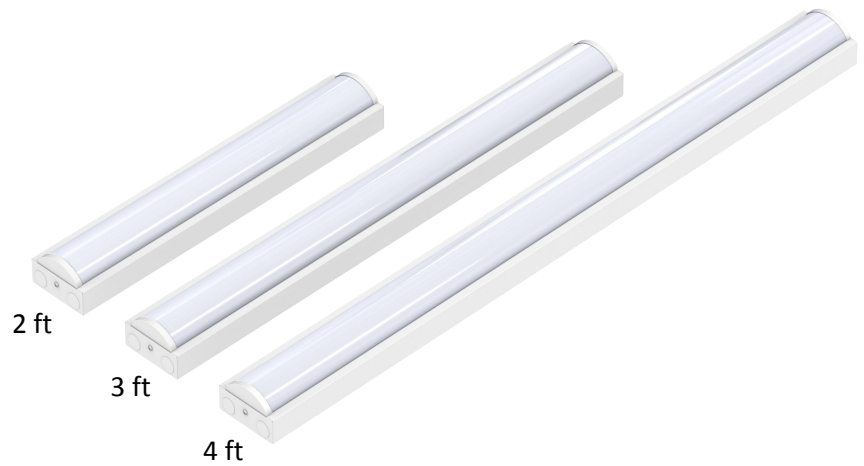

Ordering Guide

Series	Lumen	Voltage	CCT	CRI
<input type="checkbox"/> DGL-ST-3 3ft LED Linear Light	<input type="checkbox"/> 3000lm	<input type="checkbox"/> AC 120V <input type="checkbox"/> AC 347V <input type="checkbox"/> AC120-277V <input type="checkbox"/> AC 120-347V	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6500K	<input type="checkbox"/> 80+ <input type="checkbox"/> 90+
Dimming	Finish			
<input type="checkbox"/> Non-Dimming <input type="checkbox"/> 0~10V Dimming	<input type="checkbox"/> White <input type="checkbox"/> Satin Nickel			

*Other Special Requirement Please Contact with us

