XL-002-S-3-TL LED DOWLIGHT

Catalog #		Prepared by		LiteHarbor	
Project		Date	Date		
Notes					





Pressable Trimless Miniature Multiple LED Recessed Downlight with 3 Heads

Description

This Product is the lighting embodiment of miniature, recessed LED solutions for residential and hospitality venues and boutiques. Available in a lot of shapes, frames, colors and accessories, as a straight or a symmetrical spot, or as general lighting, and it's combines choice with exclusive design and high-quality lighting technology.

Features

- The choice combines exclusive design with high quality lighting technology.
- A lot of shapes, frames and colors, providing more options for you.
- Available in 1,2, 3, 4 lamps.
- Beam Angle: 12/24/36/60/90 Degrees.
- Life Rated for 50,000 hours at 70% lumen maintenance.
- Easy installation.

Listing / Warranty

ETL listed to US and Canadian standards for damp location W/Feed through.

5 Year Limited Warranty.



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019


Applications

Suitable for jewelry stores, boutiques, luxury goods stores, shopping malls and other places that require concentrated lighting and accent lighting.

Parameter

Voltage	AC 120V/277V/120~277V				
Frequency	60 Hz				
Watt	6W/lamp				
Driver	Liteharbor				
Dimmable	Dimming/Non-dimming				
Lumen	480-600lm				
Light Source	COB				
CRI	90+				
Beam Angle	12/24/36/60/90D				
CCT	2700K-5000K				
Material	Aluminum				
Finish	White/Black/Brown				

Dimensions

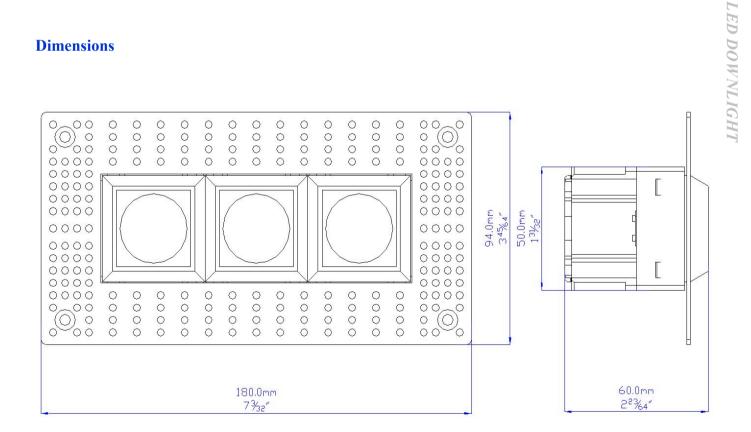



Liteharbor Lighting Technology Co., Ltd. New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019

LED DOWNLIGHT





Black



Brown

Ordering Guide

Series/Lumen	Input Voltage	CCT/CRI	Finish	Dimming
□ XL-002-S-3-TL	□ 120V	□ 3000K/90+	□ White	Dimming
LED Downlight	□ AC 277V	□ 4000K/90+	Black	□ Non-Dimming
	□ AC 120~277V	□ 5000K/90+	□ Brown	

Beam Angle

- □ 12°
- □ 24°
- □ 36°
- □ 60°
- □ 90°

Liteharbor Lighting Technology Co., Ltd.New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jul. 2019

^{*}Customized is available

^{*}Other special requirements please confirm with our factory