

BL4-A-S01 LED DOWNLIGHT

Catalog #		Prepared by		LiteHarbor	
Project		Date			
Notes					





4 Inch Square Shape LED Downlight

Description

This product is a high efficiency SMD LED downlight with selectable tri colour temperature and a powder coated white finish frame. It can be easily install in different types of ceiling without having to undergo messy and complicated routing and housing reconstruction while providing you with high quality lighting every time you need.

Features

- Full luminaire made of high quality die cast aluminium.
- Protected LED driver performs at 120V (120-277V available).
- This fixture is built to last with maintenance-free energy efficient LEDs.
- Beam Angle: 90 Degree.
- IP Rating: IP44.

Applications

Apply to residential, automotive, parking, education, government, healthcare, hospitality, offices and banks, religious, retail.



Liteharbor Lighting Technology Co., Ltd.
New Industry Area Hecun Danzao Town
Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jun. 2019

LED DOWNLIGHT

Specification


Specification			
Watt	15W		
Voltage	AC 120V/120-277V		
Driver	Liteharbor		
PF	>0.9		
Lumen	1200lm		
Light Source	SMD		
CRI	90+		
Beam Angle	90		
CCT	2700K-5000K		
Material	Aluminum		
Finish	White/Black		


Listing / Warranty

ETL listed to US and Canadian standards for damp location W/Feed through.

3 Year Limited Warranty.

Dimensions







Liteharbor Lighting Technology Co., Ltd. New Industry Area Hecun Danzao Town Nanhai Foshan City Guangdong China TEL: +86-757-8180 8687


FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jun. 2019

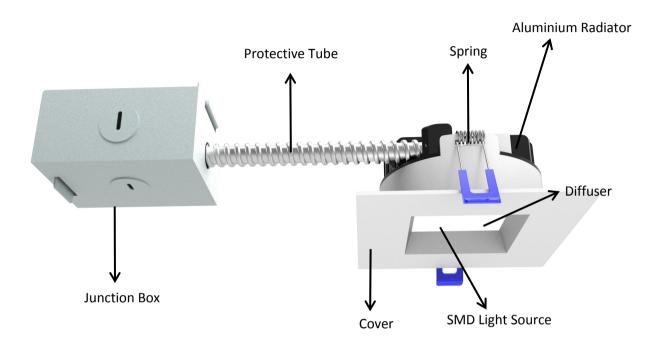

Ordering Guide

Series	Input Voltage	Watt	CCT	Finish
□ BL4-A-S01	□ 120V	□ 15W	□ 2700K	□ Black
LED Downlight	□ 120-277V		□ 3000K	□ White
			□ 4000K	
			□ 5000K	



TEL: +86-757-8180 8687

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jun. 2019