XMI207 XML207 LED Exit & Emergency Light

| Catalog # Prepared by Lite! | | LiteHarbor | | |
|-----------------------------|--|------------|--|--|
| Project | | Date | | |
| Notes | | | | |







- 1) Injection-molded thermoplastic ABS housing
- 2) AC-Only or self-powered models.
- 3) 120V/347V AC operation.
- 4) Long-life, energy-saving LED technology.
- 5) Power-on LED indicator Light and push-to-test switch.
- 6) Comes standard with two pictogram films per face, for direction selection
- 7) Low volt battery disconnection-preventing deep discharge damage to the battery.
- 8) Universal canopy available.
- 9) Universal knockout chevrons.
- 10) Innovative, snap-together design allows for fast installation
- 11) UL listed.
- 12) Warranty-2 years limited warranty.

| | | ~ . | |
|-----|-------|-----|-----|
| HA | using | Cal | OHE |
| 110 | using | CU | wui |

WH/BK


Letter Colour

Green / Red

Mounting

Universal (wall, side or ceiling mounting)

Key hole slots are stamped into the backplate

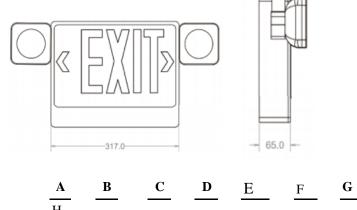

| п | (E) | 1 |
|------------------------|---------|---|
| | charbor | 1 |
| Item No.:XMI207 XML207 | | |

| A | Series |
|---------------|------------|
| XMI207 XML207 | Exit Combo |

| В | Sign |
|---|-----------|
| | Exit Sign |
| R | Running |

| C | Input Voltage |
|-----|---------------|
| | 120V |
| 347 | 347V |

| D | Face Q'ty |
|----|-------------|
| SF | Single Face |
| DF | Double Face |

| Е | Battery Backup |
|------------|----------------|
| | Battery Backup |
| ΔC | AC Only |



Liteharbor Lighting Technology Co., Ltd. New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685 E-mail: info@liteharbor.com Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015

| Lamps | F | Housing Color |
|--|----|---------------|
| LED mounted on print circuit board (for exit sign) | BK | Black |
| 2X6V 5.4 watt MR16 lamps for emergency mode | WH | White |
| | | • |
| Battery | | |
| Lead-Calcium battery (6v 4.5Ah) | G | Letter Color |
| The sign is designed with a maintenance free | RD | Red |
| Self-Powered model delivers standard two hours of | GN | Green |
| back-up lighting | | • |

Recharge time of the battery is twenty-four (24) hours.

| W | arr | an | ty |
|---|-----|----|----|
| | | | |

2 years limited warranty.

| | Н | Arrow Direction |
|---|-----|-----------------|
| _ | | No indicators |
| | LA | Left indicator |
| | RA | Right indicator |
| | UA | Up indicator |
| | DA | Down indicator |
| | URA | 45 °up right |
| | DRA | 45 °down right |
| | ULA | 45°up left |
| | DLA | 45 °down left |







Liteharbor Lighting Technology Co., Ltd.

New Industry Area Hecun Danzao Town

Nanhai Foshan City Guangdong China

TEL: +86-757-8180 8675

FAX: +86-757-8180 8685

E-mail: info@liteharbor.com

Website: www.liteharbor.com

Specifications subject to change w/o notice

Revision: Jan. 2015