


XM205I LED Exit & Emergency Light

Catalog #		Prepared by	LiteHarbor
Project		Date	
Notes			

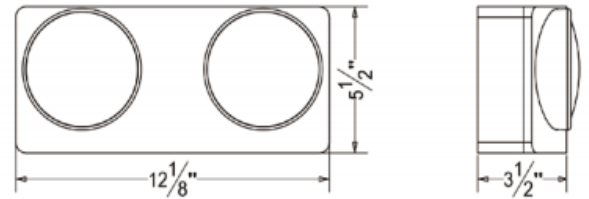

Housing

Injection-molded thermoplastic ABS housing.
 94V-0 flame rating.
 Two fully adjustable eyeball shape light heads for emergency light.
 Innovative, snap-together design for fast installation.

Electrical

120/277 VAC Dual voltage operation.
 Low power consumption-3.8 watts at normal operation, 15 watts at emergency operation.
 LED indicator light and push button test switch.
 Remote capability- may power additional remote heads (up to 6V 12W) with additional battery.

Lamp

2×6V 5.4W DC T15 wedge lamps for emergency mode.

Battery

Lead-Calcium Battery (6V 4.5Ah).
 May use additional battery, when add remote light heads to the fixture. (Total 2pcs×6V 4.5 Ah battery)
 Low voltage battery disconnection.

Mounting

Wall or Ceiling mounting.
 Easily removed mounting knock-outs and J-box pattern on back plate.

Warranty

2 years limited warranty.



EXIT & EMERGENCY LIGHT

